

8 CHAMBER LOCKER

USER MANUAL 




CONTENTS

TOP UNIT



x1

BASEPLATE



x1

STAND



x1

THUMBSCREW



x8

EXTENSION CORD



x1

POWER CORD



x1



120V 15A OUTLET
REQUIRED



SCAN ME




(800) 516-3580

SETUP INSTRUCTIONS




01

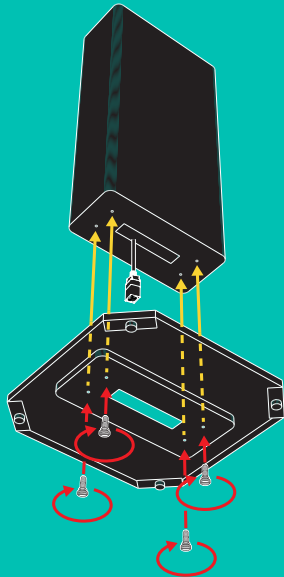


Attach the stand to the baseplate and fix it using 4 thumbscrews

02

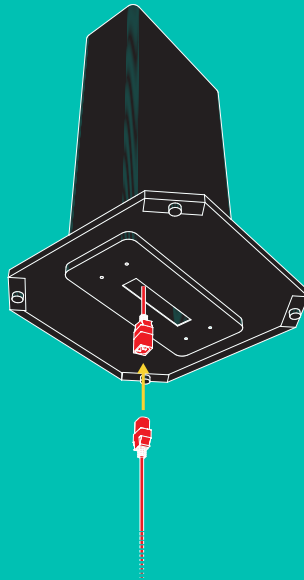


Connect power cord to the extension cord

03

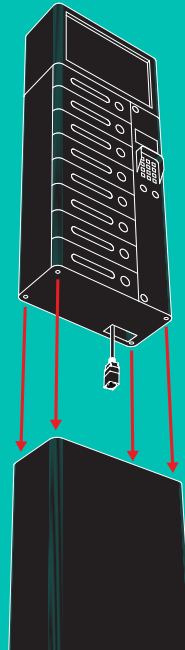


Attach top unit to the stand

04

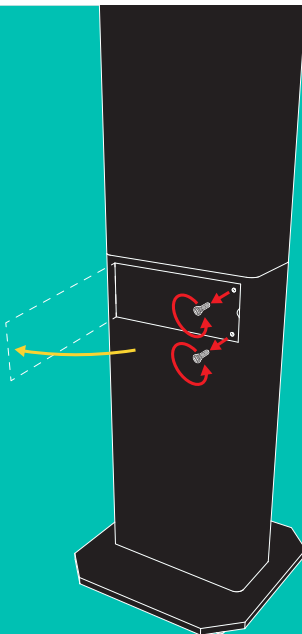


Unscrew 2 screws on the back and open the maintenance door

05

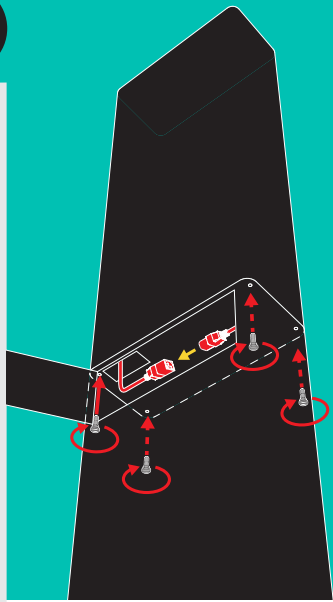

Connect power cord with the extension cord and fix top unit to the stand using 4 thumbscrews

06

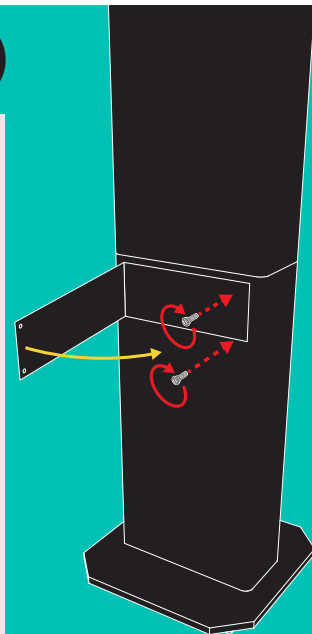


Close the maintenance door and screw the screws back



support@incharged.com

RETURN

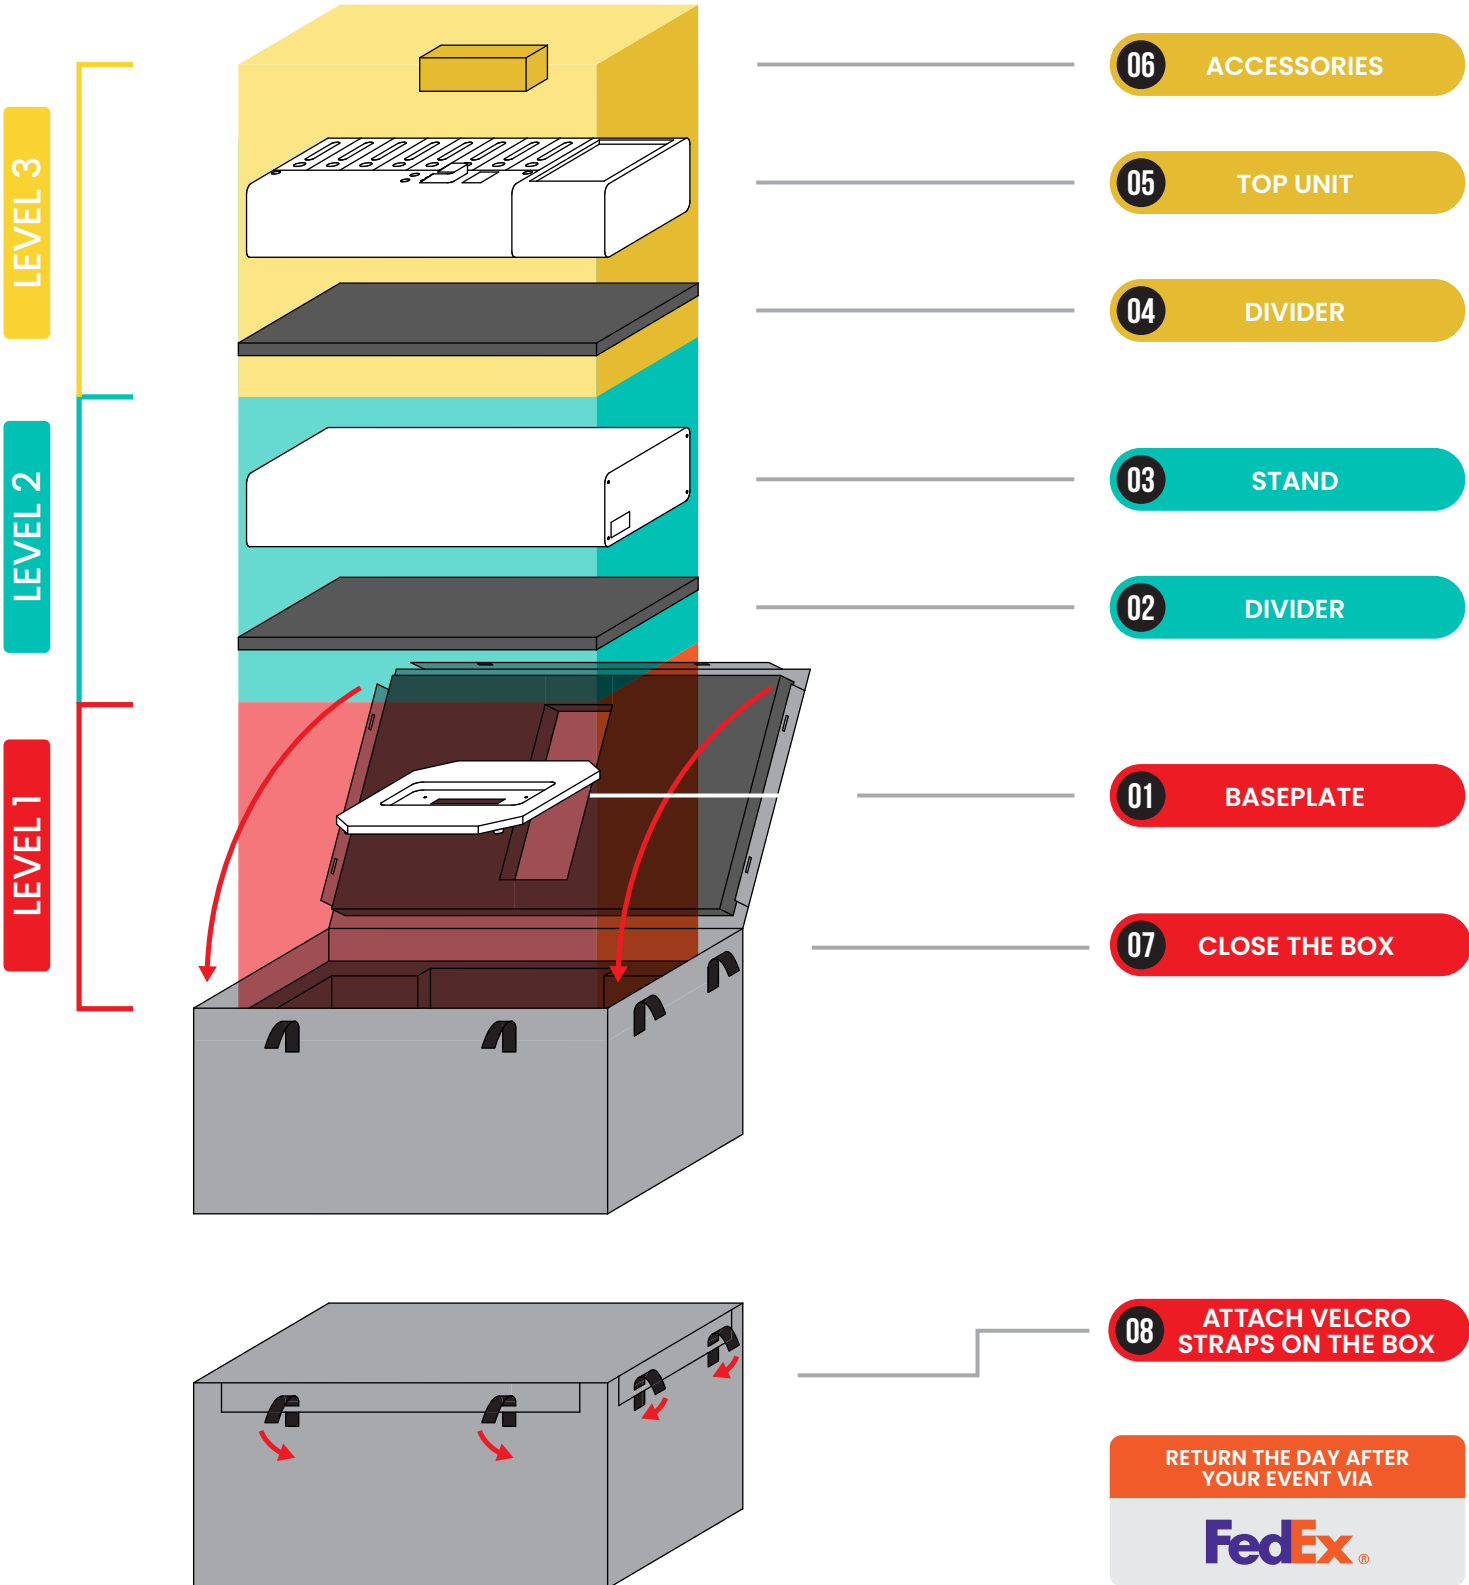



Emergency

ADMINISTRATIVE MODE

Set up of Admin Password, to enter Admin Mode press:

0 # 0 # 0 #

Admin password:
* * * * *
==>Press < # >

==> Press < 1 >
Factory reset.
==> Press < 2 >
Modify Password.

1

2

1 3 5 7
 2 4 6 8
 0 Reset All
==> Press < # >

Enter a new
8-digit password
==>Press < # >

0

1 2 3 4
5 6 7 8

- - - -
- - - -

#

#

#

Resets all boxes

Resets
corresponding box

Resets
corresponding box

Resetting....
Please wait a mo
ment.

Factory setting
reset completed.

The administramo
tor password is
modified success
fully.

WARNING



Default Password:


88888888

Please change it
before
implementing the
locker.




Resetting admin password to factory defaults

01

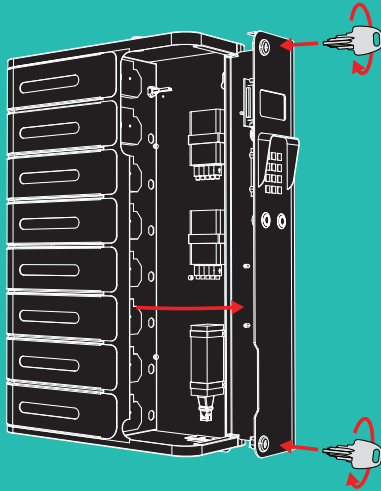

Open the control box door with key provided.

02

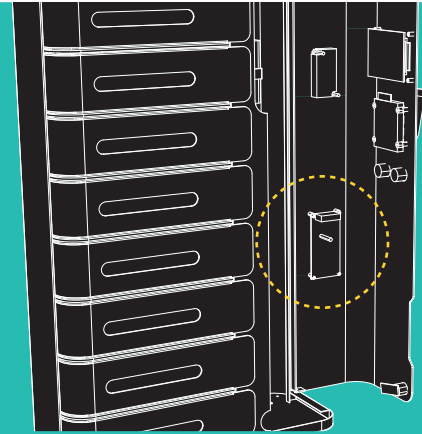

Press to reset admin password to factory defaults.



Turn to adjust speaker volume.

SPECIFICATIONS



- Input : AC 100 - 240V / 50~60Hz
- Output (per locker box) : 5V/2.4A Max
- Charging Cable (per locker box):
Micro USB Cable + Lightning Cable
+ Type C Cable
- Dimensions: 410 x 180 x 655 mm
- Material (Housing) : Cold Rolled Steel

NOTES ON USE



- To prevent fire on shock hazard, do not expose the device to rain or moisture.
- To avoid electric shock, please do not disassemble the device.
- If trouble occurs, immediately disconnected the device from wall socket.


MAINTENANCE

- Wipe the device with a soft dry cloth to prevent dust build up.
- Keep the device away from strong volatile solvents or chemicals, such as thinner, benzene, alcohol, pesticide, rubber or vinyl plastic etc, which may lead to deterioration or damage to your devices.




Cable replacement

01

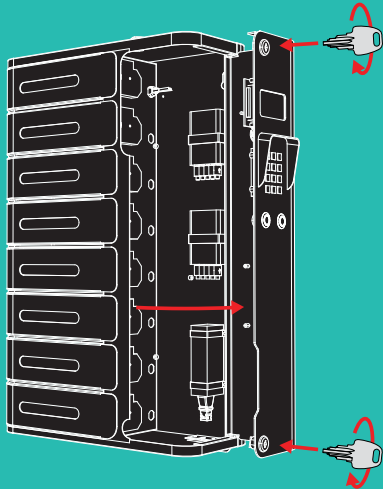


Open the control box door with key provided.

02

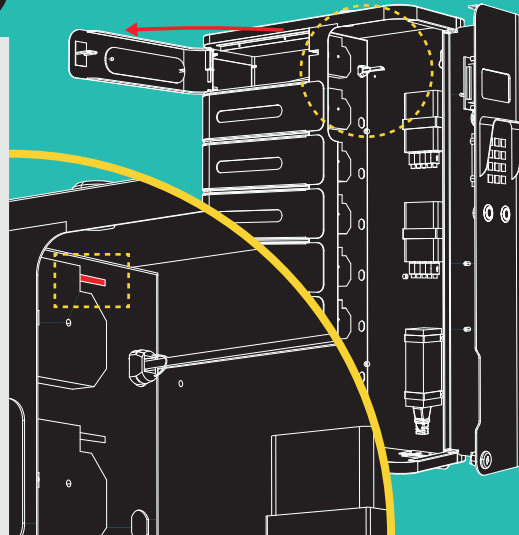

Unlock the door by pressing the button on the lock.

03

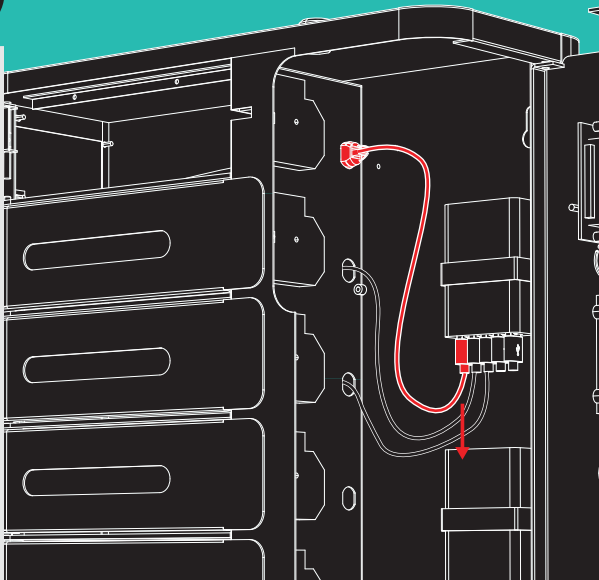

Open the cable clip. Unplug USB Cable.

04



Take out the cable through the hole, replace with new cable and plug back into USB port. Make sure to close cable grip when finished.



1. PORTAL LOGIN

- Navigate to 47.244.204.20/Webedit/ on any browser with an active internet connection and login with the user and password provided to you.

2. UPLOADING FILES TO THE SERVER

- Go to the **'Resource'** tab at the top and click on the **'Resource'** link in the sub-menu.
- On the left side click on the file type/classification you want to add (Image or Video).
- Click on the middle **'Upload'** button and then click **'Browse'**.
- Find the file you want to upload and then click **'Open'**. After it loads you will see it listed on the Resource tab.
- ***Important:** Resolution for all images and videos MUST be 1920 x 1080 in order to fit properly on the screen.

3. CREATE CONTENT FOR THE SERVER

- Go to the **'Content'** tab at the top and click on the **'New Content'** link in the sub-menu.
- On the upper part of the page, you can change the name of the content to relate to the content you've uploaded for easy organization later.



This button is for adding an image.



This button is for adding a video.

- Check the box of the file you want to insert/upload and click **'Add'**.
- Make sure to update the dimensions to the correct resolution (1920 x 1080) and check the **'Full Screen'** box at all times.
- Click **'OK'**.
- Now click **'Save'** and then **'Publish'**.

4. PUBLISH YOUR MEDIA

- Go to the **'Content'** tab at the top and click on the **'Publish'** link in the sub-menu.
- Click on **'New Publish'**.
- Select the player/unit(s) you want to publish your media to.
- Click **'Select Content'** and select the content you want to add to your unit(s).
- Click **'Add'**.
- Set the **'Expiration Date'** at the bottom to the desired date. You can't turn this feature off, but if you want your unit to play the media for a long time, set the date a couple of years ahead.
- When finished, click **'OK'**.
- Click **'OK'** again on the dialog box.
- Wait for the file(s) to finish uploading. Once uploaded, the media will automatically play on the unit when turned on with an active internet connection.

5. DELETING MEDIA FROM UNITS

- Go to the **'Content'** tab at the top and click on the **'Manage'** link in the sub-menu.
- Check the box of the content you want to delete.
- Click **'Delete'**.
- Select the **'Delete this content from the server and all players'** if you **don't** plan on using this media/content anymore.
- Select **'Delete this content from all players'** if you **do** plan on using it again in the future.
- Click **'OK'** once done.

6. DELETING MEDIA FROM SERVER

- Go to the **'Resource'** tab at the top and click on the **'Resource'** link in the sub-menu.
- Check the media you want to delete.
- Click **'Delete'** and then **'OK'**.