
GLOBAL™ INDUSTRIAL
We can supply that.®

User's manual	Manual del usuario	Manuel de l'utilisateur
Customer Service US: 1-800-645-2986	**Servicio de atención al Cliente US: 1-800-645-2986**	**Service à la clientèle Canada: 888-645-2986**

Slim CPU/PC Monitor Mount Bracket

Model #: 282486

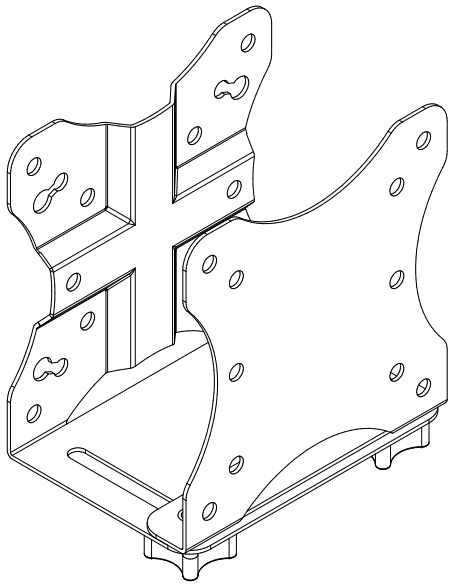

Part No.	Description	Qty
1	Mount Front	1
2	Mount Back	1
3	Knob	2
4	Strap	1
5	Pole Mount Bracket	1
6	Adhesive Pad	3

Hardware No.	Description	Qty	For Use
H1	ST3.2x19 Screw	4	Desk/ Wall Mount
H2	M6x30 Screw	2	Pole Mount
H3	D18 Washer	2	Pole Mount
H4	M6 Nut	2	Pole Mount
H5	Hex Head 5/16-18x5/8 Screw	4	Orbit Series
H6	D8 Spring Washer	4	Orbit Series
H7	M4x10 Screw	8	VESA Mount
H8	M4 Nut	4	VESA Mount


ASSEMBLY INSTRUCTIONS

STEP 1

Remove knobs from mount **(1)** and separate the mount.




Product Description



MOUNTING OPTIONS


OPTION A: ORBIT MOUNT

Attach the larger half of mount to Orbit mount **(2)** using four 5/16-18x5/8 screws **(H5**) & D8 Spring Washers **(H6)**. Apply one adhesive pad **(6)** to the assembled mount and two pads to the inner face of the other half **(2)**.

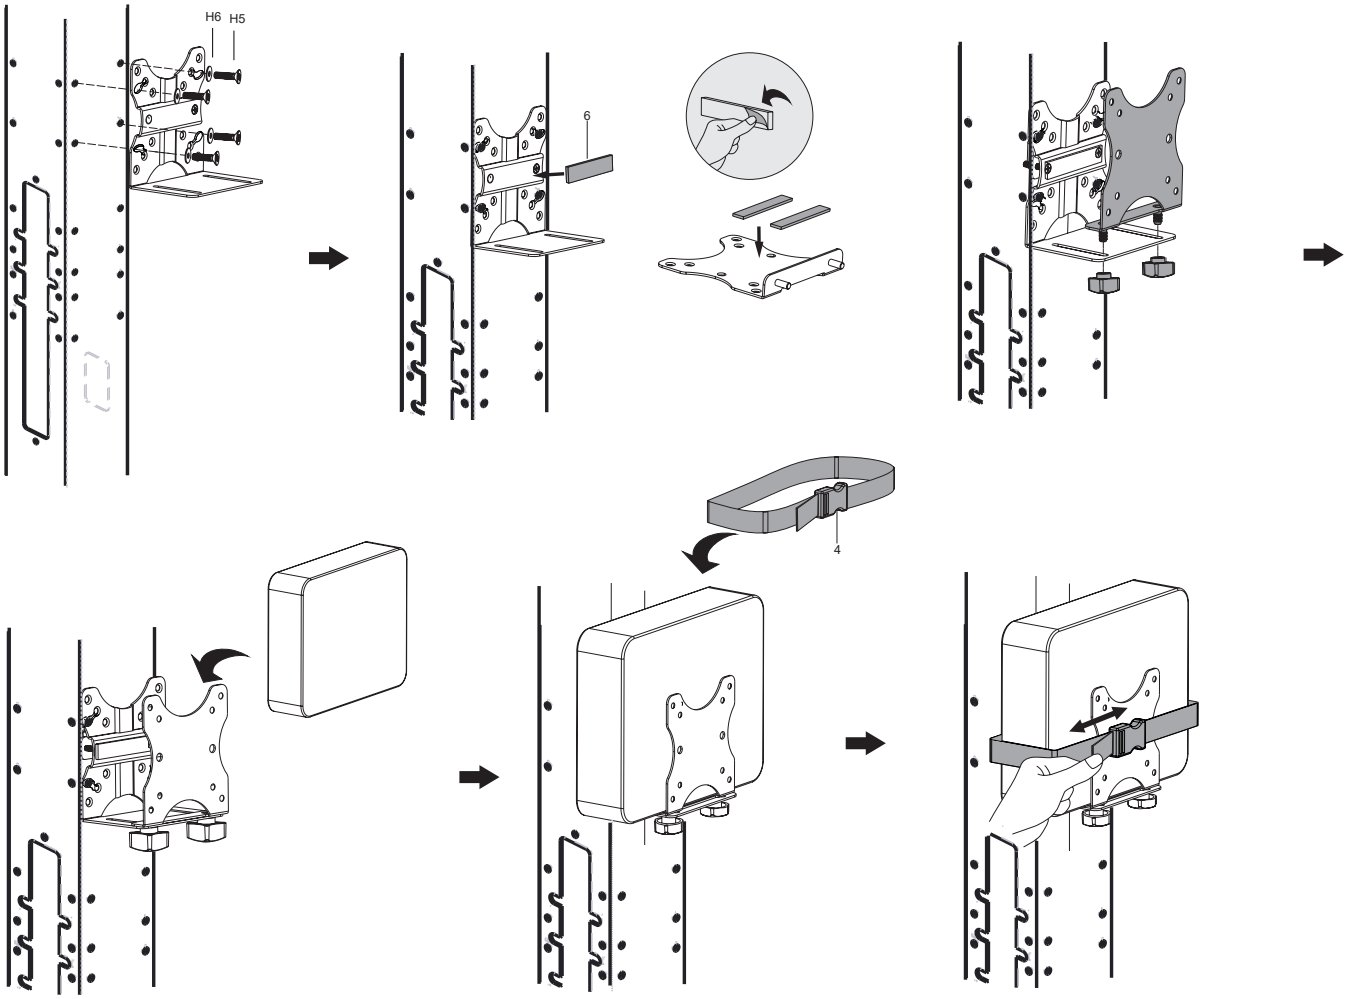

OPTION B: VESA MOUNT

Attach the smaller half of mount to VESA mount **(1)** using four M4x10 screws **(H7)**, and M4 nuts **(H8)**. Apply two adhesive pads **(6)** to the assembled mount and one pad to the inner face of the other half (**2**).

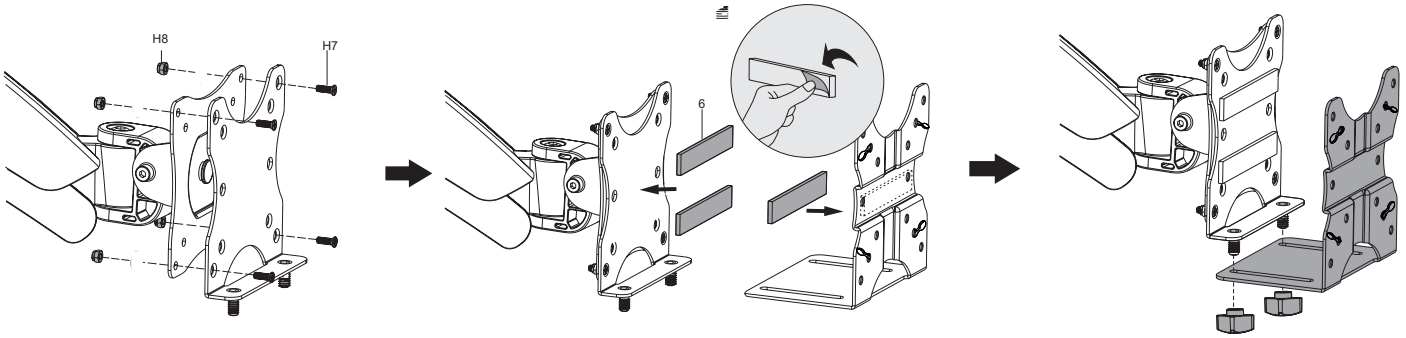


Product Description

Option B *(Continued)*


If also installing a monitor, with the strap **(4)** fit into the slot, attach larger half of mount to monitor using four M4x10 screws **(H7)**. Attach halves using knobs **(3)**.

Place PC into mount, adjust to fit, and tighten knobs. Secure PC using the strap **(4)**.

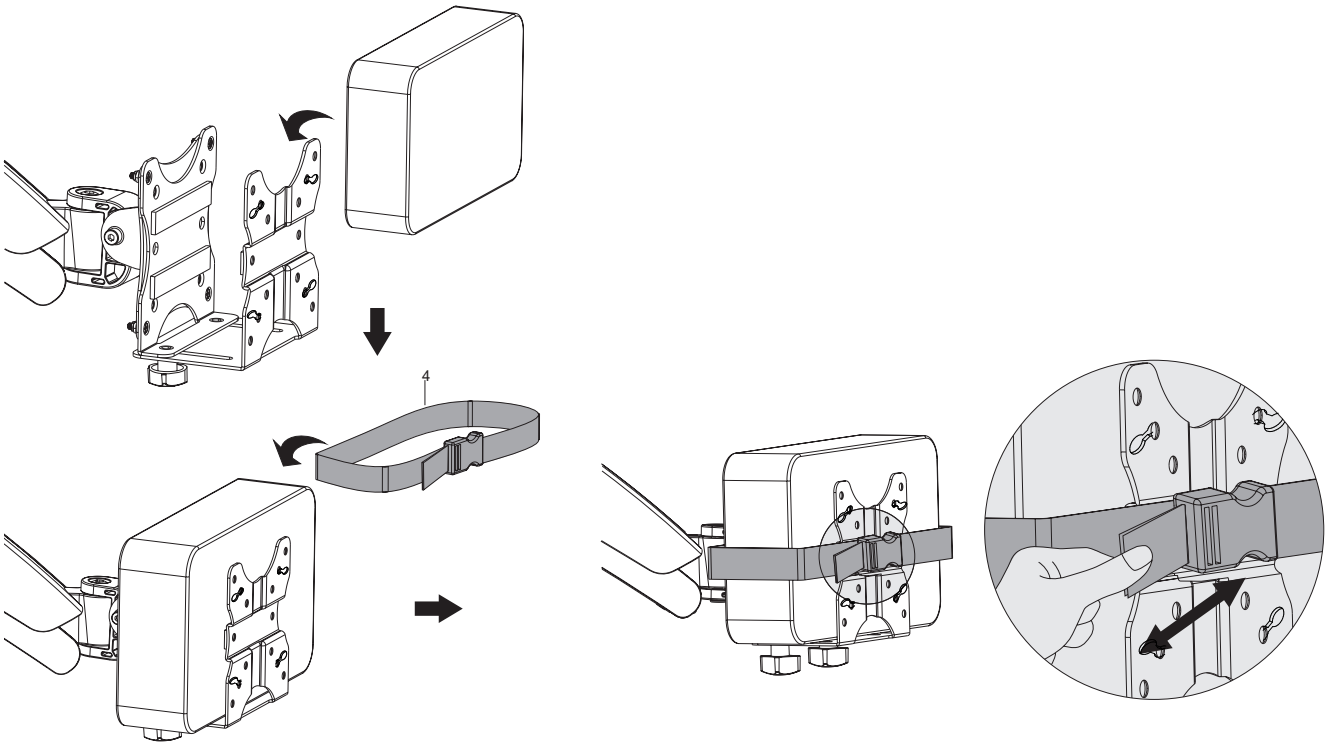

OPTION C: POLE MOUNT


Attach larger half of mount **(2)** to pole using the pole mount bracket **(5)**, M6x30 screws **(H2)**, D18 washers**(H3)**, and M6 nuts **(H4)**. Apply one adhesive pad **(6)** to the assembled mount and two pads to the inner face of the other half. Attach halves using knobs **(3)**. Place PC into mount, adjust to fit, and tighten knobs. Secure PC using the strap **(4)**. Pole diameter must be 1.2 inches to 1.8 inches in diameter for mount to fit.

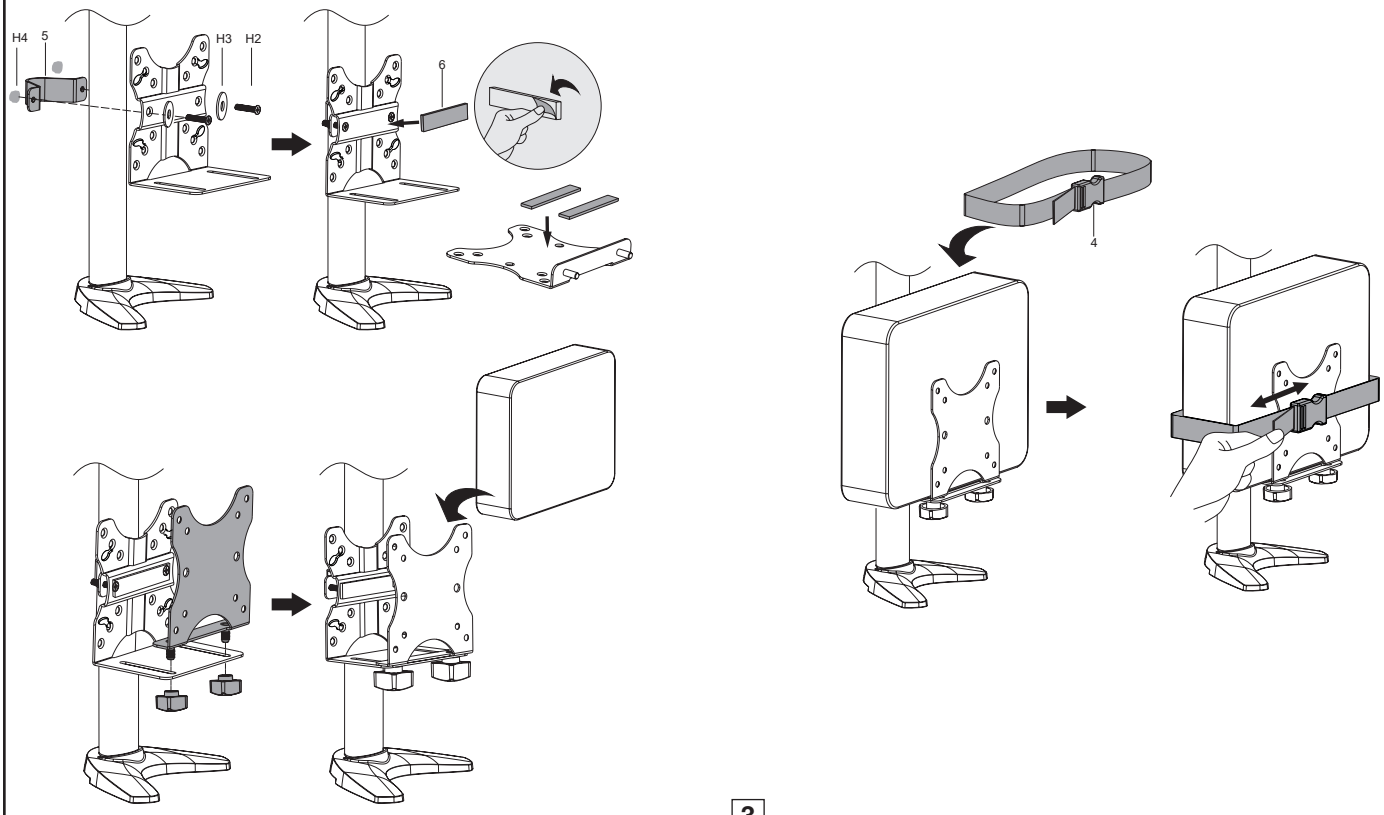


Product Description

OPTION D: UNDER DESK MOUNT

Apply one adhesive pad **(6)** to the larger half of mount and two pads to the inner face of the other half. Use outer four holes on mount to mark drilling locations on the underside of the desk. Drill holes no deeper than 5/8" (16mm) using a 3/16" (2.4mm) bit. With the strap **(4)** fit into the slot, attach larger half of mount to the desk using ST3.2x19 Screws **(H1).** Reattach halves using previously removed knobs.

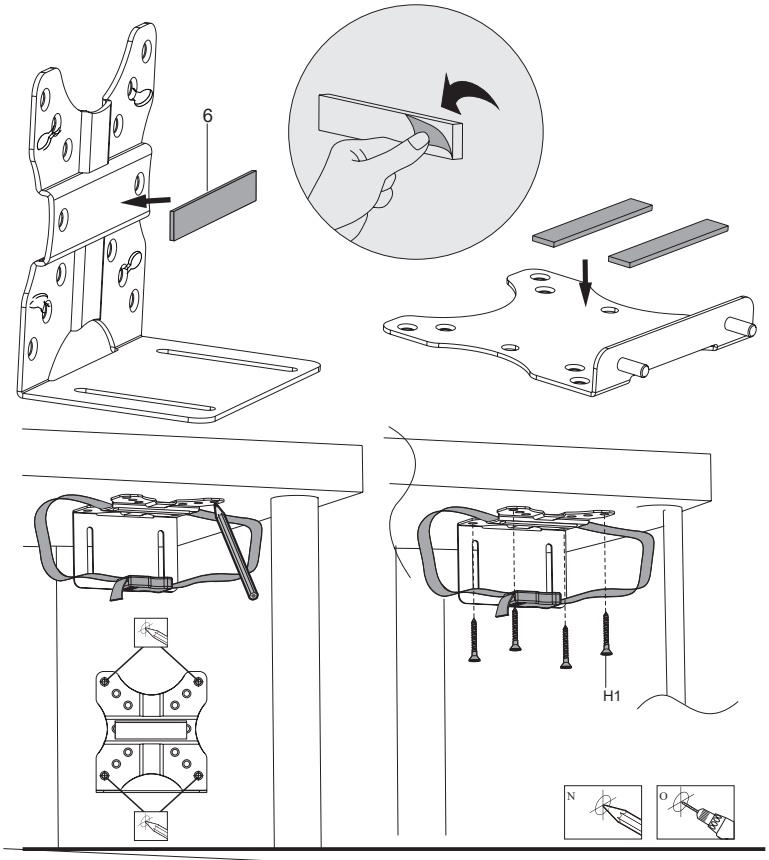

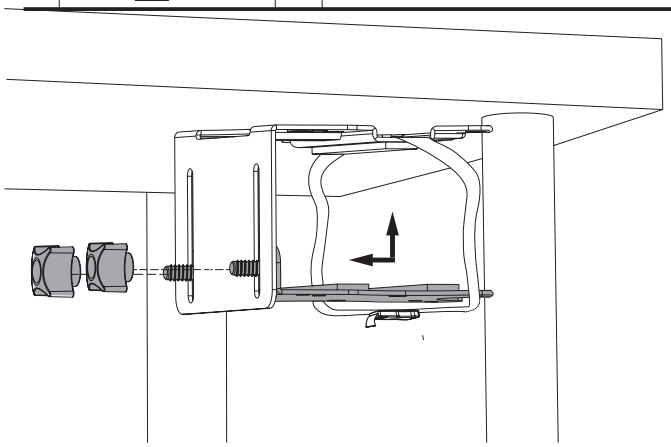

Place PC into mount, adjust to fit, and tighten knobs. Secure PC using the strap.

