

Mobile Charging Cart

Please read entire manual carefully prior to assembly and use.

If there are any additional questions, contact Global Industrial Customer Service at 1-800-645-2986 or visit www.globalindustrial.com.



Model# 987878

Mobile Storage & Charging Cart
for 75 iPad® & Tablet Devices

WARNING - For commercial use only. Read all instructions before assembly and use. Save these instructions for future reference.

DANGER - RISK OF ELECTRIC SHOCK

- Always unplug unit before cleaning.
- Connect this cart to a properly grounded outlet only. See Grounding Instructions (pg. 2).

WARNING - To reduce the risk of burns, fire, electric shock, or injury

- Unplug from outlet before putting on or taking off parts.
- Close supervision is necessary when being used by, or near children, invalids, or disabled persons.
- Use this charging cart only for its intended use as described in these instructions. Do not use attachments not recommended by Global Industrial.
- Never operate if there is a damaged cord or plug. Do not operate if the unit is not working properly, has been dropped or damaged, or has been dropped in water. Bring the charging cart to an authorized service center for examination and repair.

- Keep the cord away from heated surfaces.
- Do not operate if the air openings are blocked. Keep the air openings free of lint, hair, etc.
- Never drop or insert any object into any of the openings.
- Do not use outdoors.
- Do not operate where aerosol (spray) products are being used or where oxygen is being administered.
- To disconnect, turn all controls to the off position, then remove plug from outlet.
- To prevent the possibility of tipping, always put heavier items at the bottom of the cart and not near the top.
- If the unit has more than one power supply, ensure all power cords are unplugged before transporting, testing, or repairing.

WARNING - RISK OF INJURY

- Do not place or use this charging cart to support video equipment such as televisions or computer monitors on the surface of the unit.
- Do not allow anyone to sit, stand, or climb on the cart.




CAUTION - SHOCK HAZARD

Disconnect all Power Sources

GROUNDING INSTRUCTIONS

This product is for use on a nominal 120-volt circuit and has a grounding plug that looks like the plug illustrated in the below sketch. Make sure that the product is connected to an outlet having the same configuration as the plug. No adapter should be used with this product.


















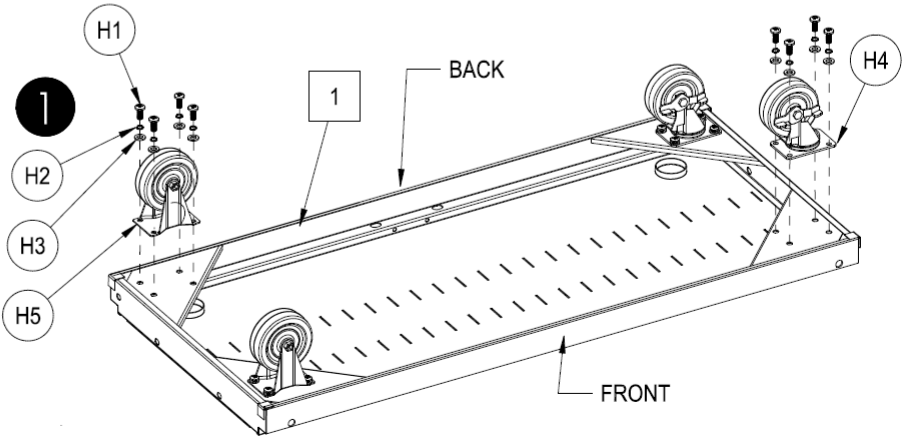
TECHNICAL INFORMATION


Model	987878
Product Dimensions	43-1/2"W x 21"D x 40"H
Product Weight	180 lbs.
Slot Quantity	75
Slot Dimensions	1-5/8"W x 12"D x 10-3/8"H
Outlet Type	AC
Number Of Outlets	90
Power	(6) UL/cUL Listed 15-Outlet Power Strip
Voltage	120V, 12A
Cord Length	15 ft.


ASSEMBLY INSTRUCTIONS


Note: The socket outlet to which a power cord is plugged must be easily accessible after the product is installed in place.


CONTENTS									
REF.	QTY.	DESCRIPTION	REF.	QTY.	DESCRIPTION	REF.	QTY.	DESCRIPTION	
1	1	BASE	H1	20	m8 x 1.25 phillips pan head screw				
2	1	RIGHT PANEL				H10	4	8.5 mm plain washer	
3	1	LEFT PANEL	H2	20	lock washer				
4	3	DIVIDER SUPPORT				H11	12	power strip bracket	
5	78	DIVIDER	H3	20	plain washer				
6	2	SHELF				H12	24	m4 x 0.7 phillips countersink screw	
7	1	TOP	H4	2	swivel caster				
8	1	HANDLE				H13	24	m3 phillips head sheet metal screw	
9	1	POWER STRIP (Long extension)	H5	2	rigid caster				
10	5	POWER STRIP (Short extension)				H14	4	Corner Bumper	
11	2	DOOR (With lock)	H6	8	SHELF CLIP				
12	2	DOOR (Plain)				H15	8	M5 x 20mm Lg. phillips Pan Head screw	
13	1	Outlet Cycle Timer	H7	18	m6 phillips pan head screw				
			H8	4	m8 x 1.25 socket head screw				
			H9	4	8.5 mm lock washer		2 (set)	Key	
									




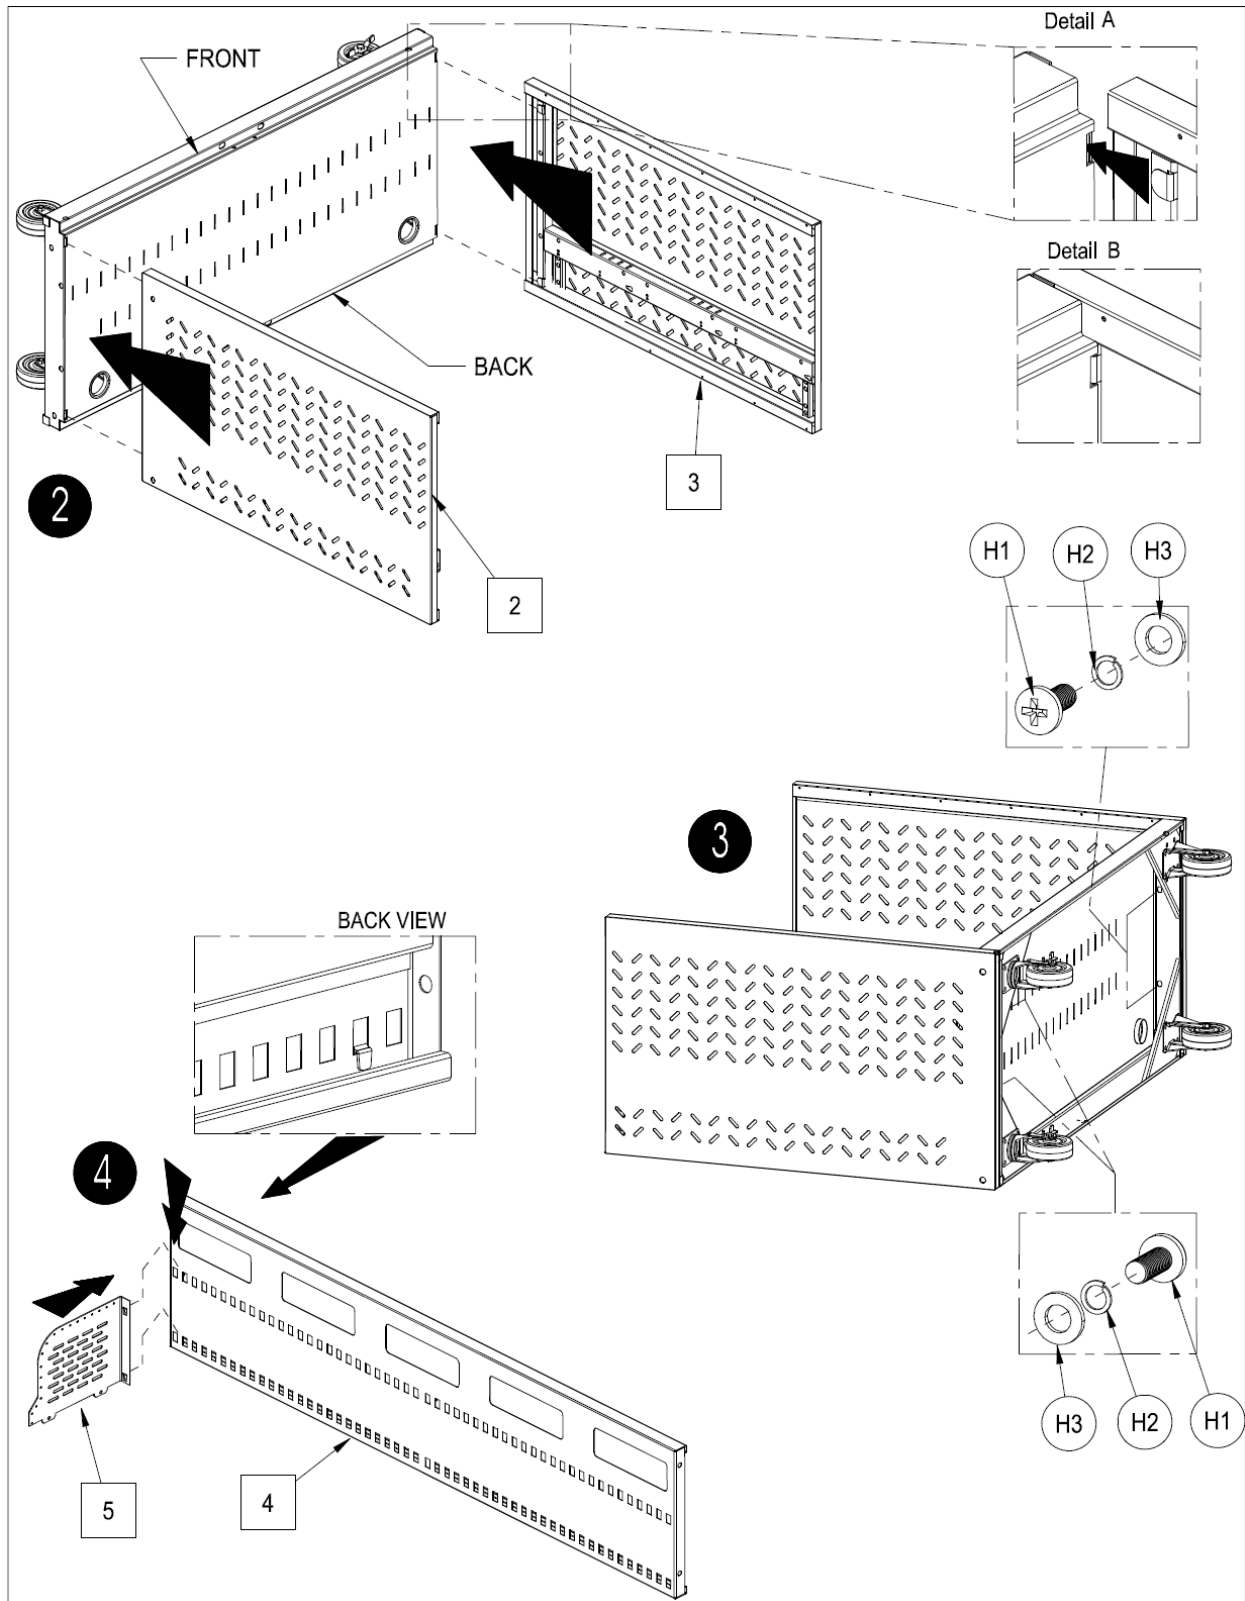

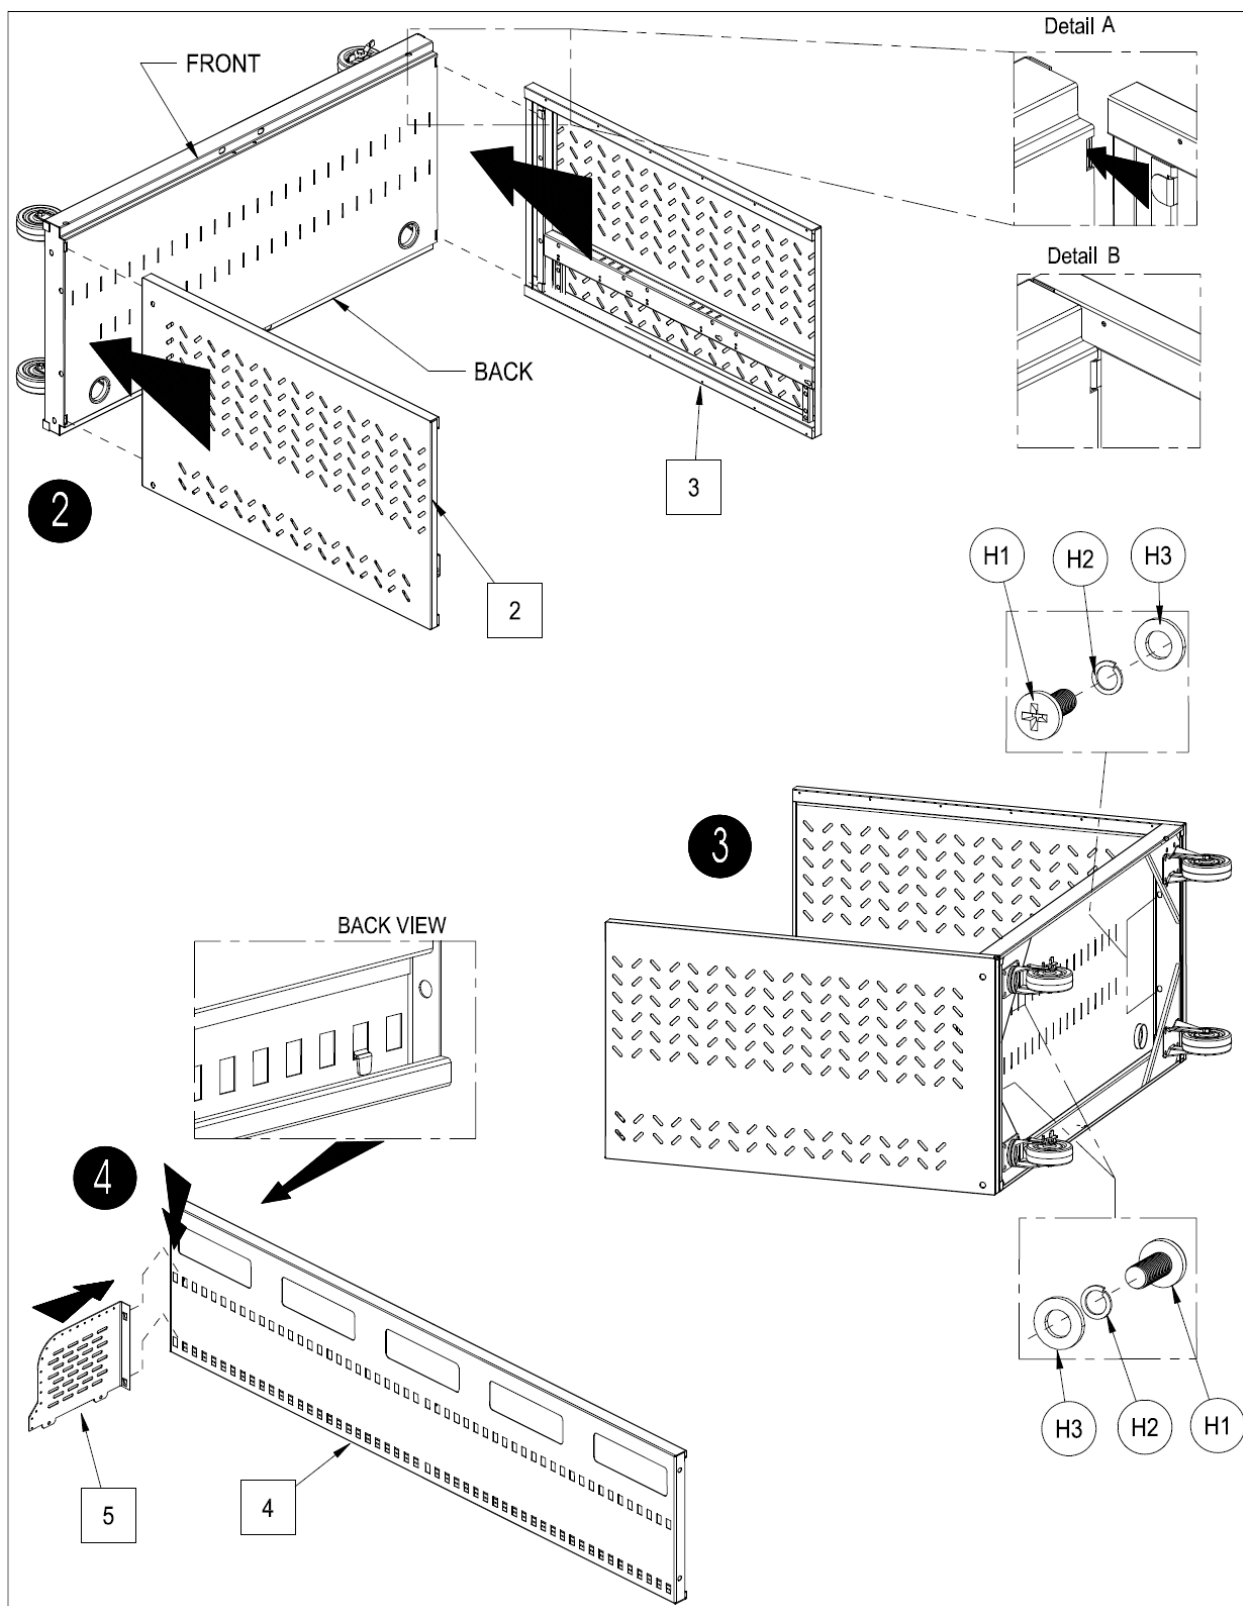


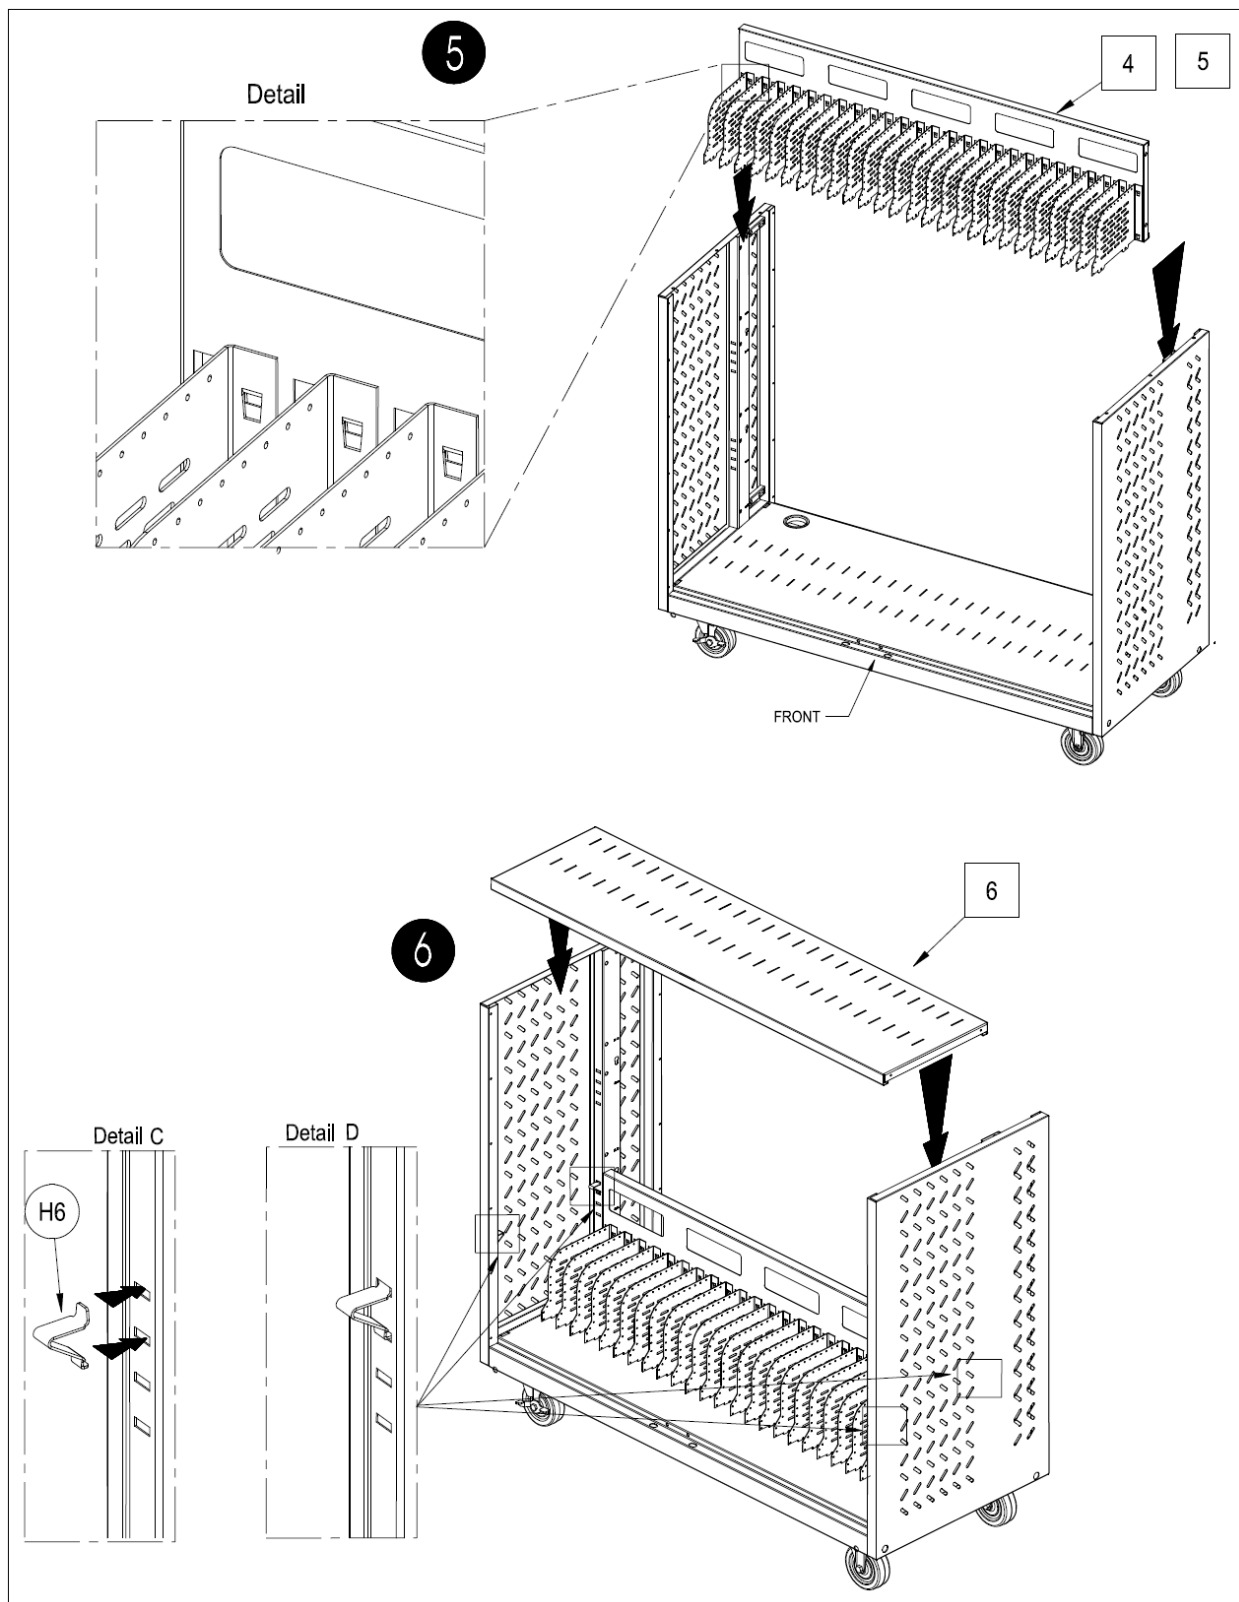


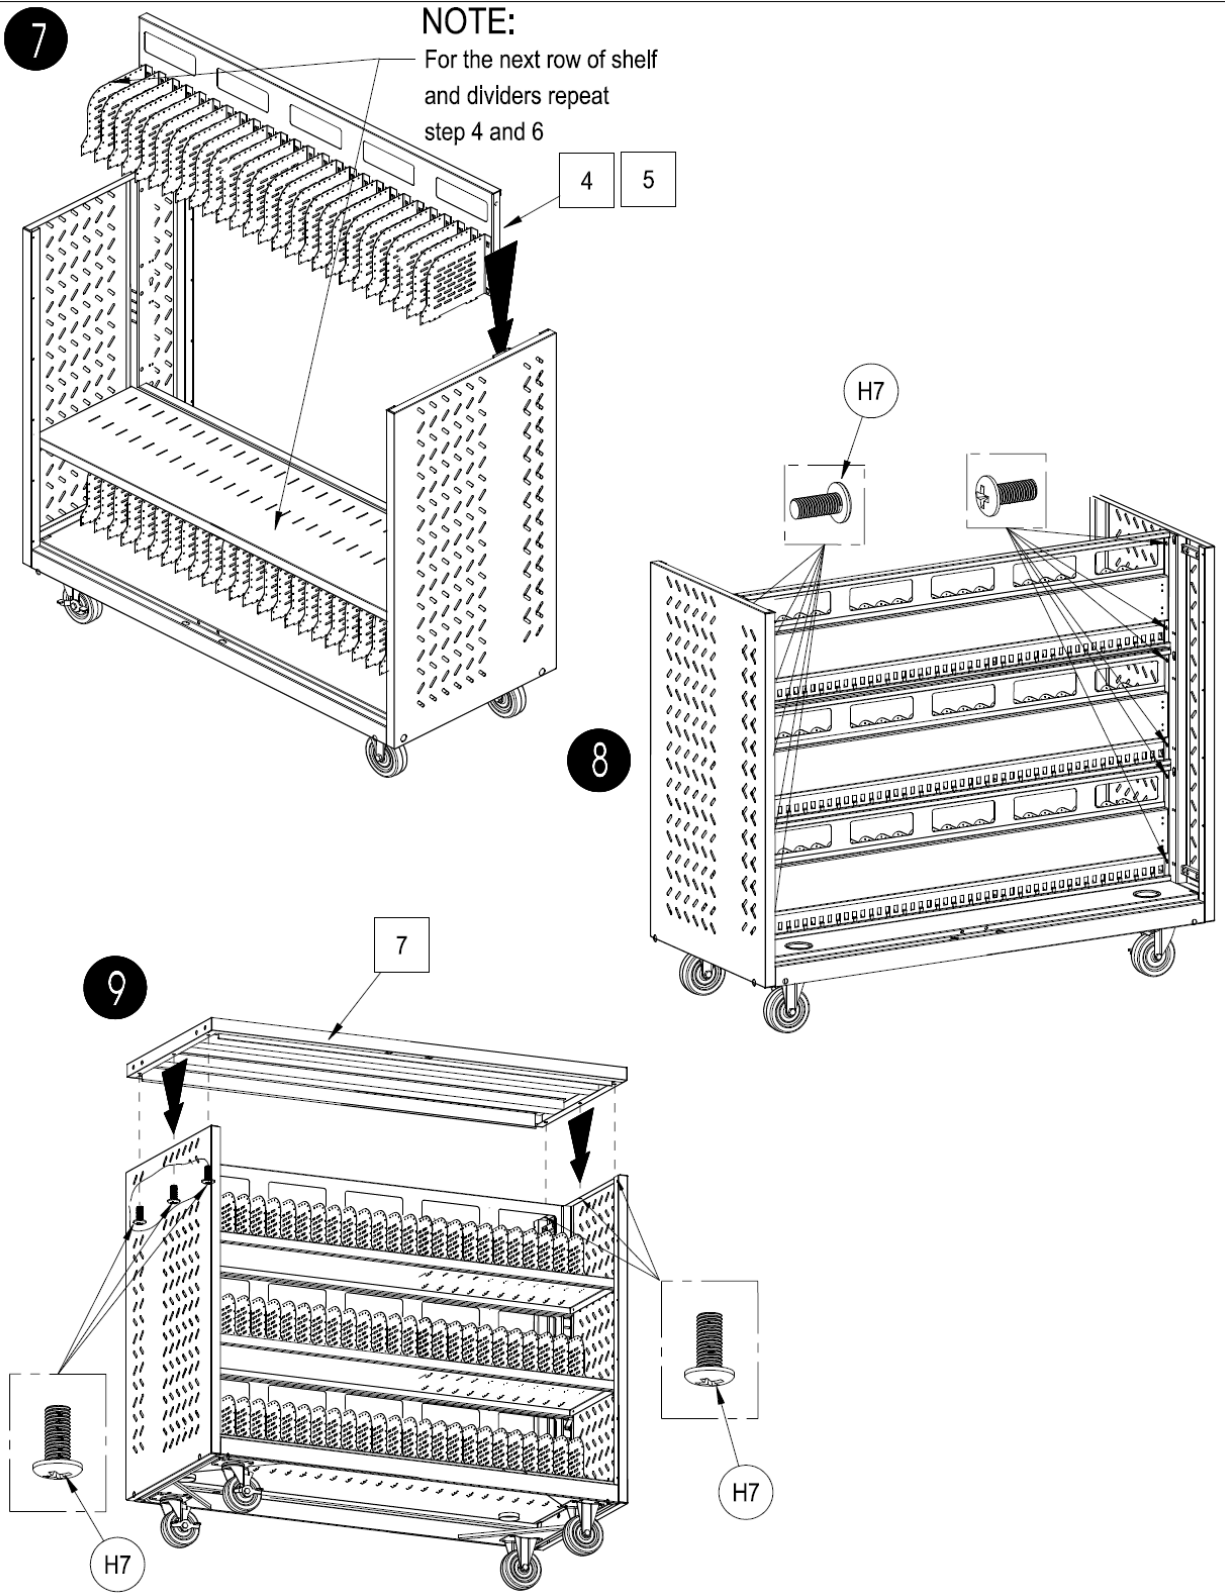

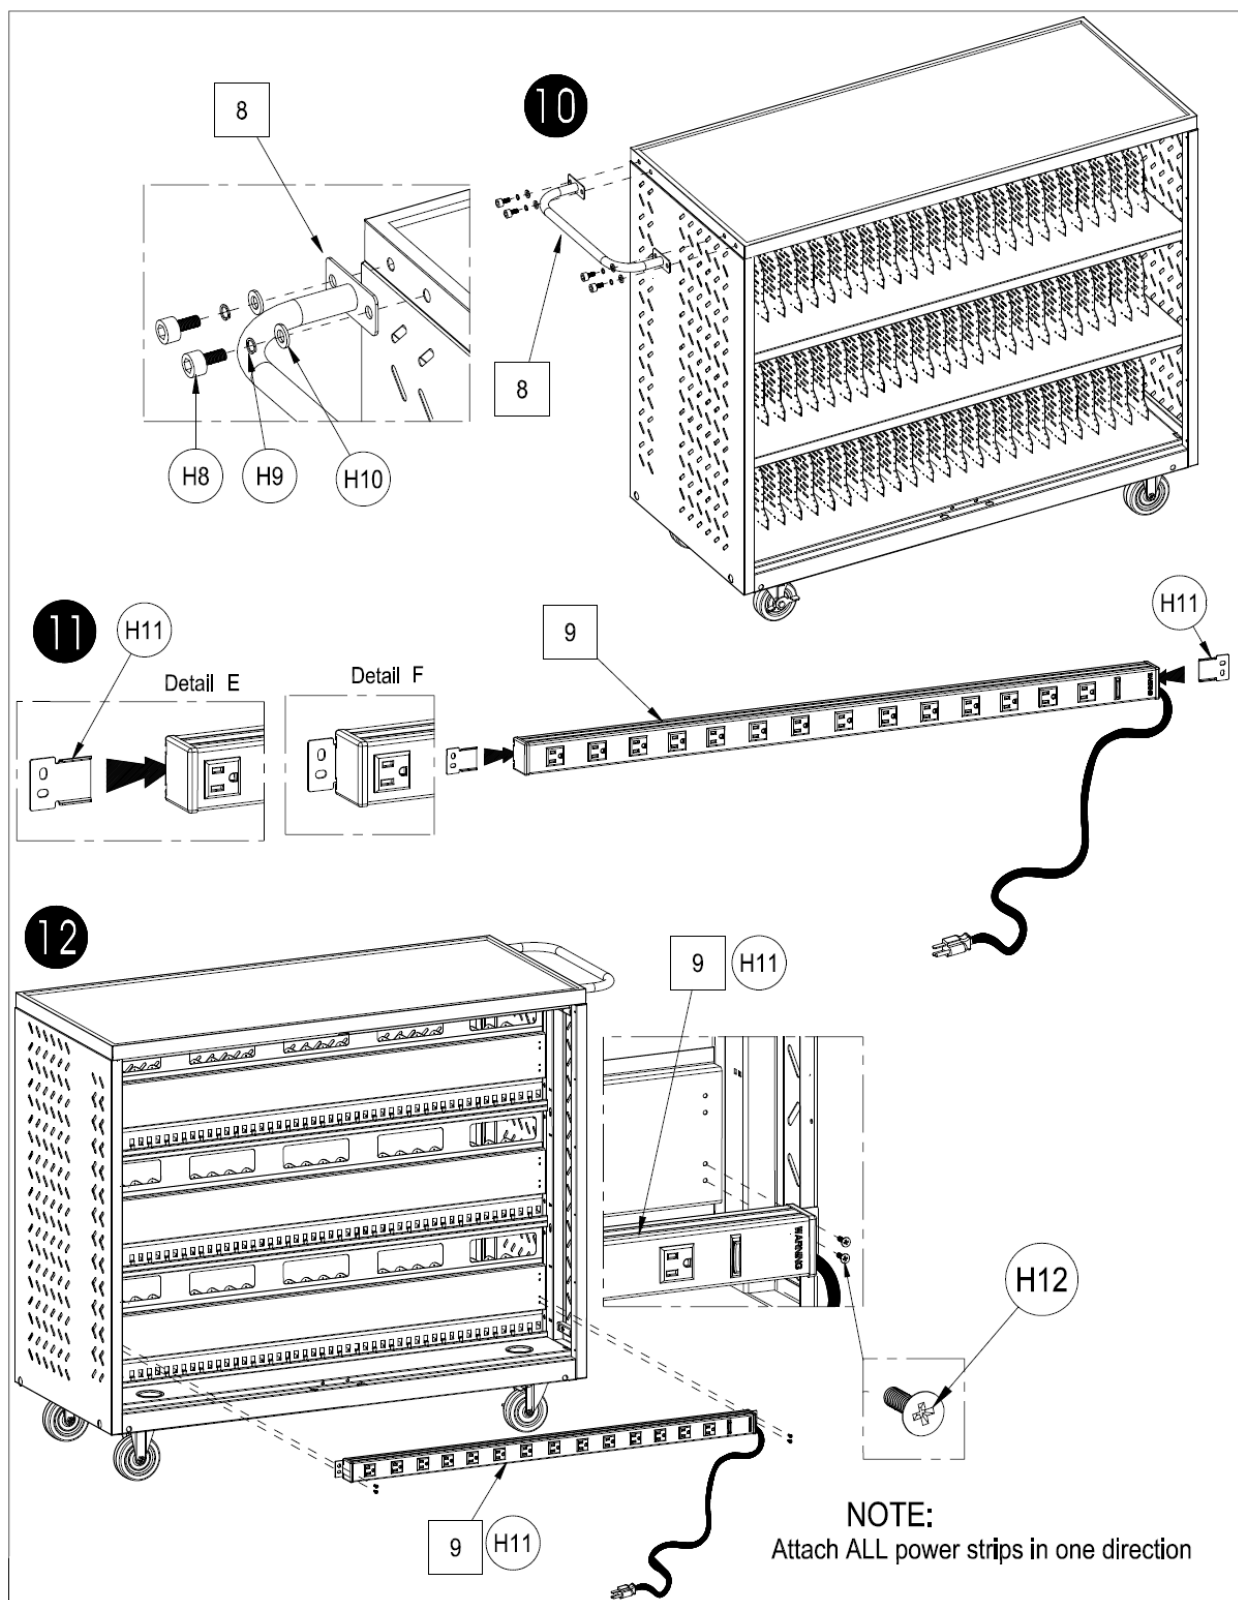


13

PLUG-IN WIRING DIAGRAM

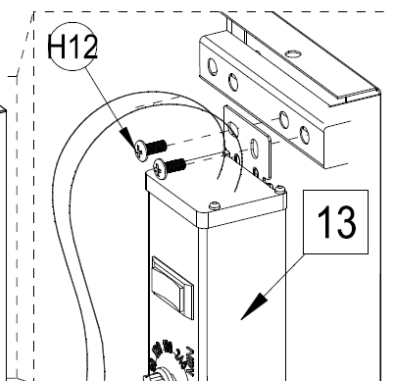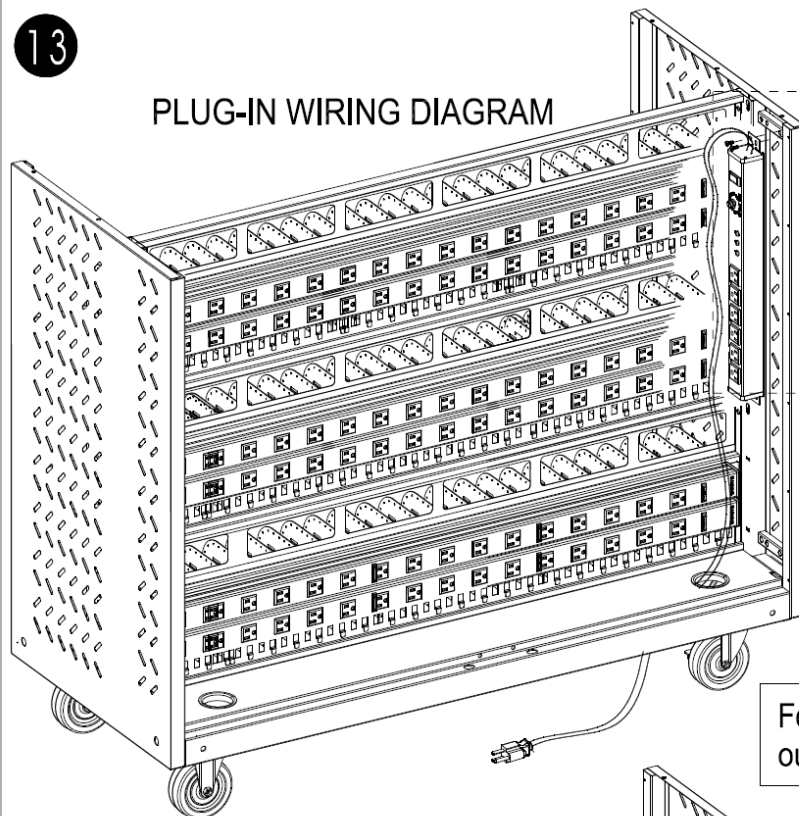


For user manual please refer to outlet cycle timer model 501644


14

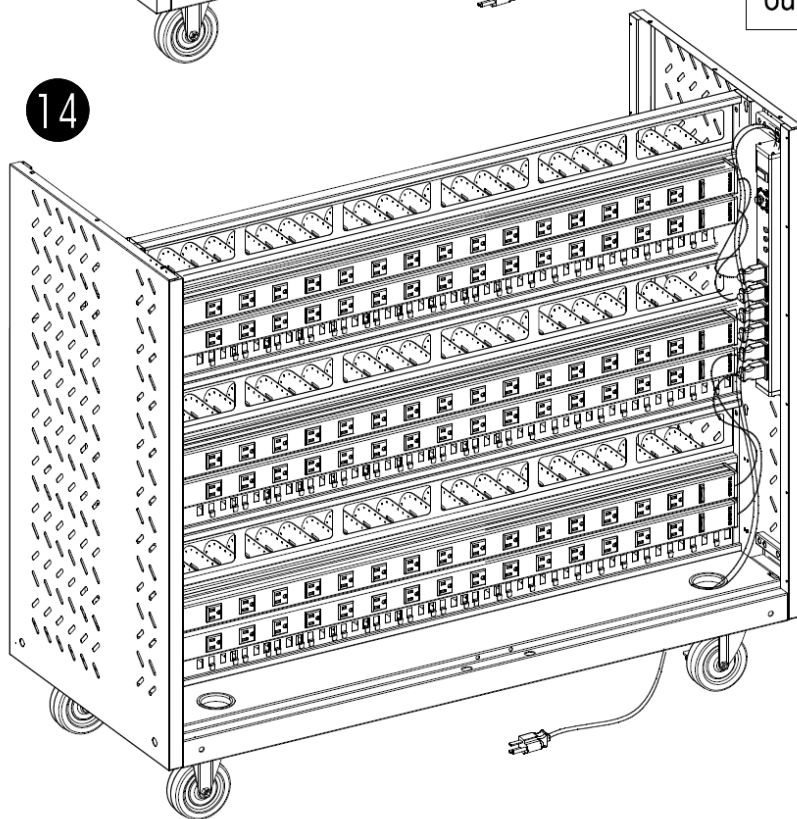

NOTE:
Attach all power strip
end terminals into outlet
timer terminals

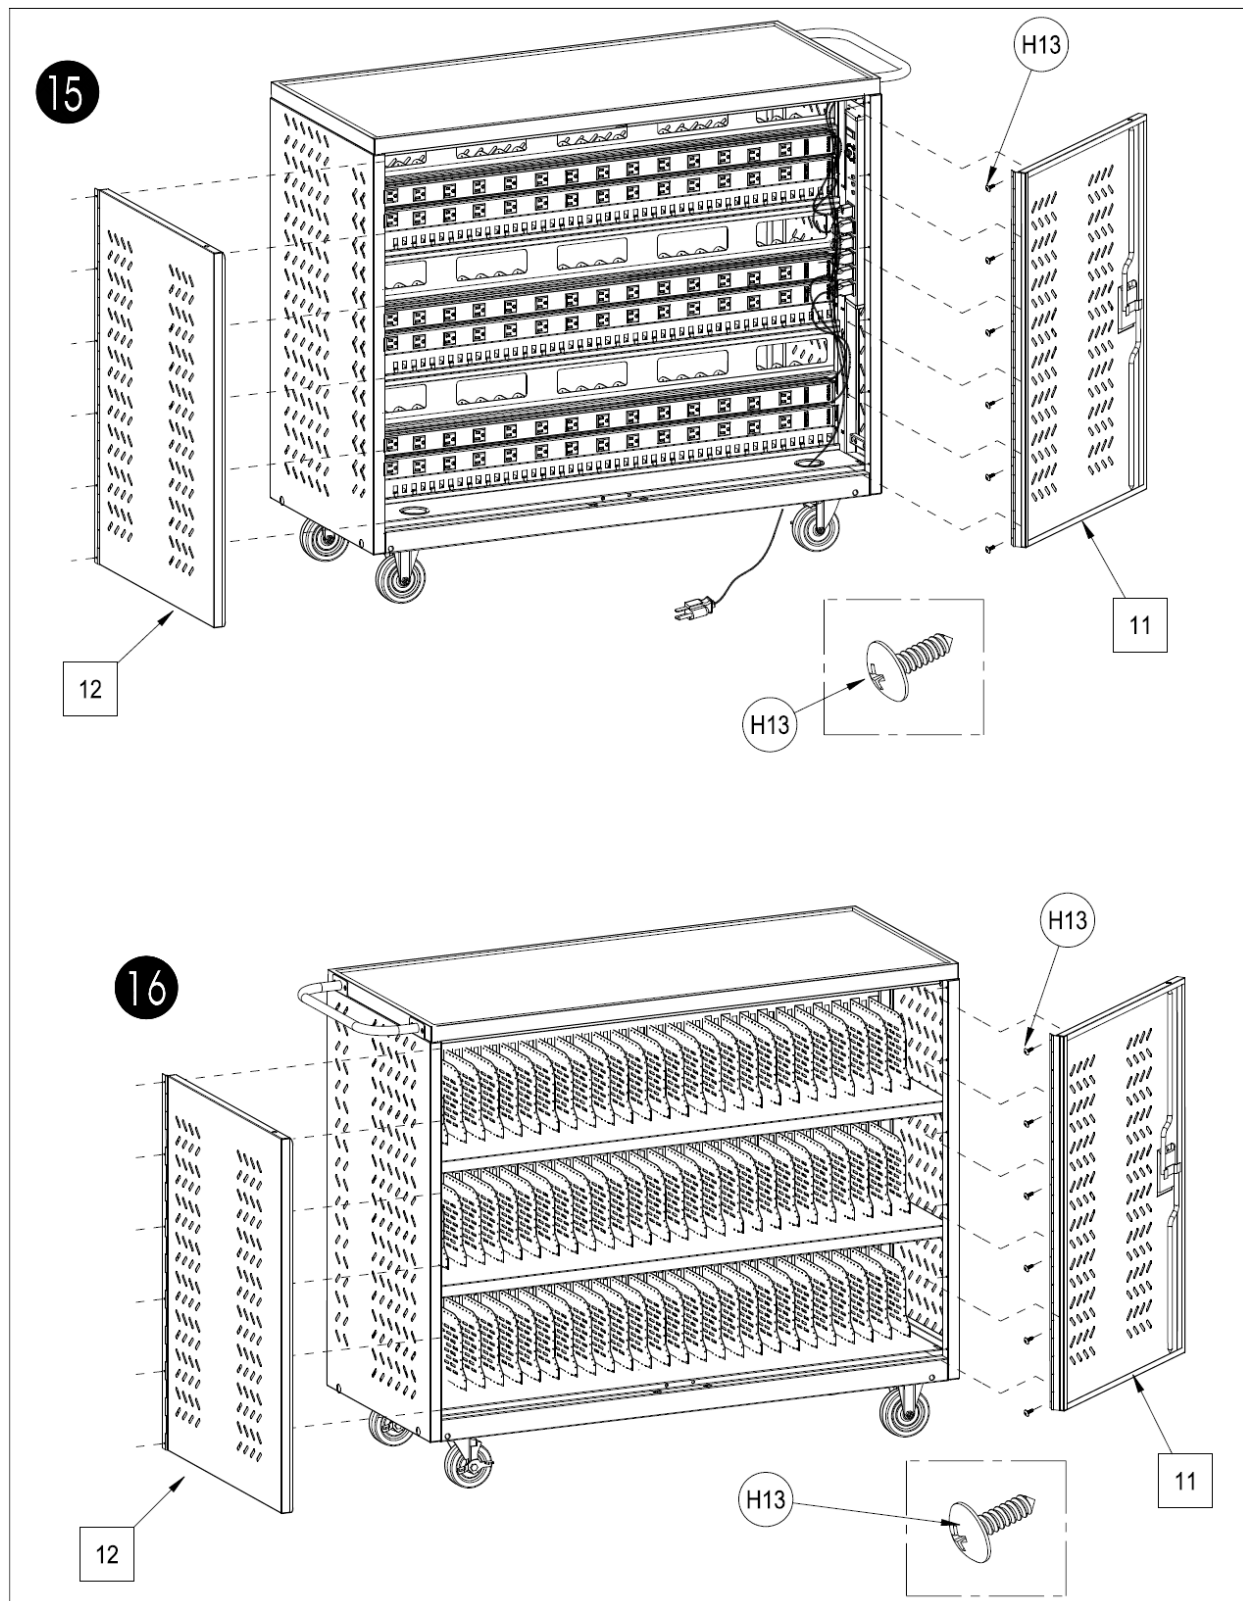

17

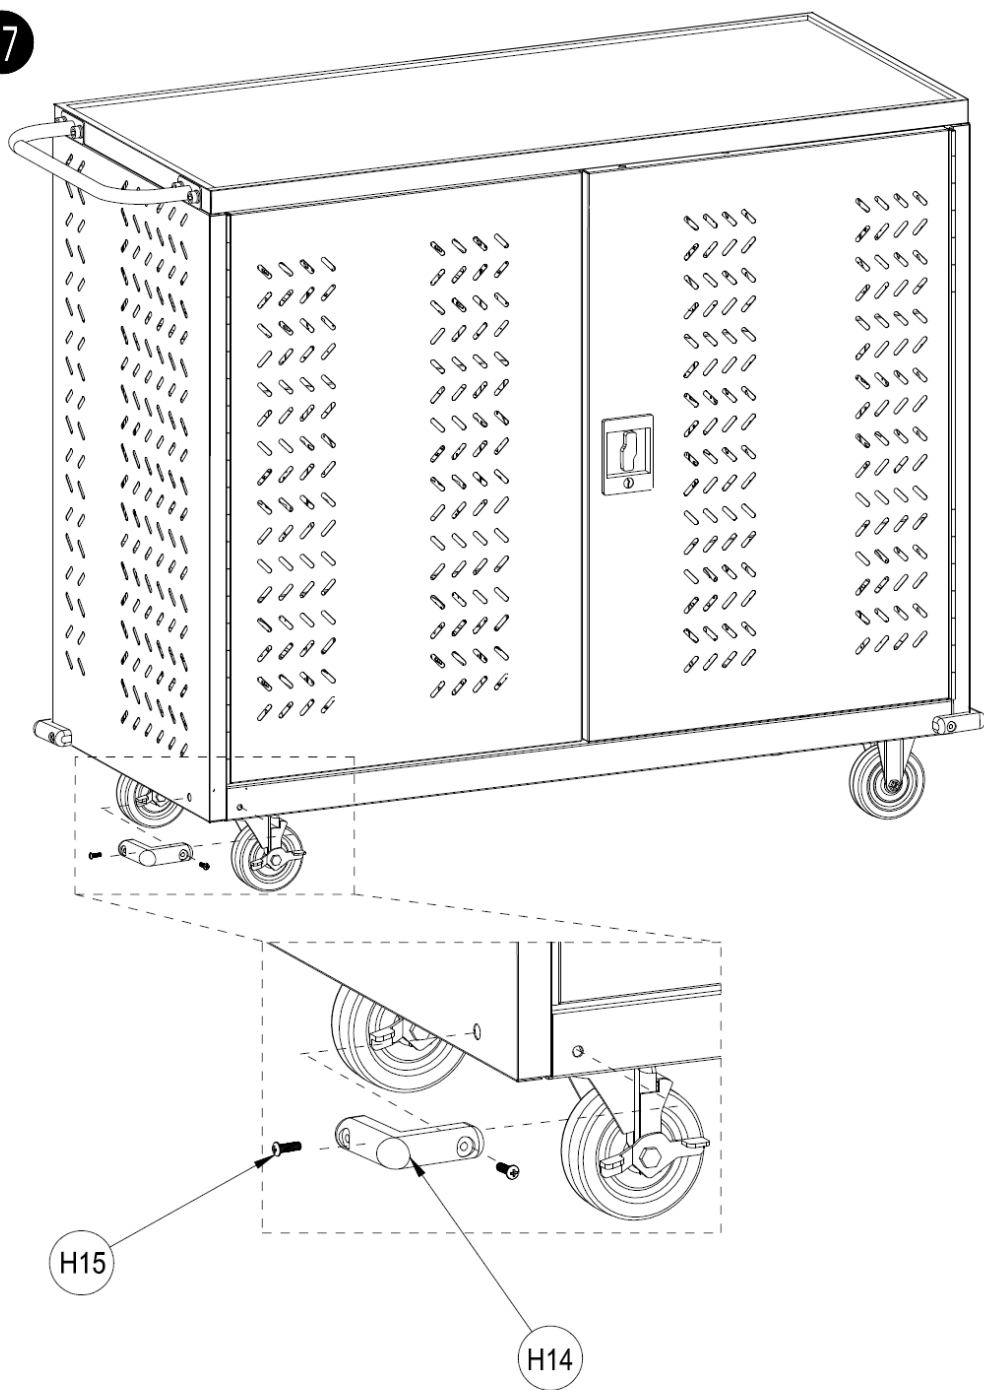

OPERATING

This charging cart stores, secures, charges and transports and up to 75 iPads®, tablets and more.

1. Open the carts rear door.
 2. Plug the device's adapter into the power strip.
 3. Route each cord over to each device and plug in.
 4. Place and charge up to 75 devices to the cart at a time.
- **Note:** Allow additional space required for the power adapters, power cords and protruding power plugs from the devices.
 - **Note:** If the circuit breaker trips; press the reset button on the power strip.

MAINTENANCE

All power cords must be unplugged before cleaning. Inspect for damage, dirt and debris on a regular basis. It is recommended that any cleaning solution be tested on a small, inconspicuous area of the cart, to ensure it does not harm the surface. Do not use steel wool, scouring pads or other abrasive materials that may damage the surface finish.

WARNING - To avoid risk of electric shock, do not expose electrical components to water, cleaning solutions or other potentially corrosive liquids or substances. Do not immerse in liquid or allow liquids to flow into the cart or its components. Wipe all cleaners from the carts surface using a damp cloth. Dry the surface thoroughly after cleaning. Do not use flammable cleaners.

CAUTION - DO NOT attempt to modify, service, or replace any part of this charging cart. Call 1-800-645-2986 or visit www.globalindustrial.com for customer service assistance, or bring to an authorized service center for examination and repair.

TRANSPORTING AND STORING

Before moving, unplug and secure all power cords, close and lock doors, remove any items from the top of the surface, unlock the casters and push slowly and carefully.

WARNING - RISK OF INJURY

- Do not move over uneven or irregular surfaces.
- Do not allow children to move.
- Lock the casters after moving.
- Do not park unit in areas of heavy traffic.
- Do not run power cords across hallways, classrooms, or other areas where they will be walked on.
- Do not leave unit unattended in areas where children have access.
- Keep doors closed and locked whenever unit is unattended or parked.
- Keep casters locked whenever the unit is unattended.