

User's manual

Manual del usuario

Manuel de l'utilisateur


Customer Service  
US: 1-800-645-2986

Servicio de atención al Cliente  
US: 1-800-645-2986

Service à la clientèle  
Canada: 888-645-2986

# Folding Wall Mounted Workbench

Models: 293664, 293665, 293666, 293667

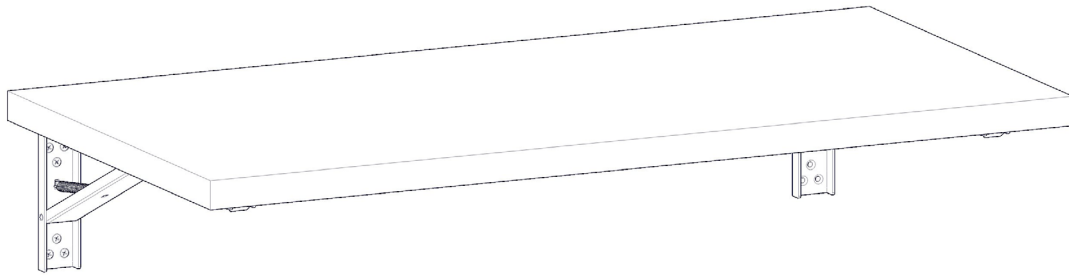

## Tools Required:

- Level
- Electric drill with Philips head bit.
- 11/64" drill bit for mounting to drywall
- 5/16" drill bit for mounting to concrete wall
- Tape Measure
- Studfinder (if mounting to drywall)
- Pencil, marker, or other writing utensil

## **Warning:**

- This product requires at least two people to install.
- Before installing this product, make sure the planned location has sufficient clearance for the bench to fold and unfold.
- Do not exceed max capacity of workbench. Doing so may lead to bodily injury and property damage.
- Do not drop the bench top when folding it down; doing so may damage the bench top. Gently lower it until it is almost in the vertical folded position.
- Keep fingers away from brackets when folding or unfolding the workbench.

# Folding Wall Mounted Workbench

## 1 Determine mounting location

If mounting to drywall:

- Brackets must be attached to wooden studs behind wall for the table to support the rated maximum weight capacity.
- Use a stud finder to locate suitable studs behind the wall.
- Distance between brackets should be as far apart as allowed by the placement of the studs without exceeding the overall width of the table.

If mounting to concrete wall:

- Center-to-center distance between brackets should not exceed 46".


Unfold the bracket into the upright position. Place it against the wall in the desired location and at the desired height. Using a writing utensil, mark the top of the bracket, bottom of the bracket, and all six mounting holes.

### NOTE:

Keep the thickness of the benchtop in mind, as it will be added to the overall height of the setup.

Repeat for the other bracket.

The marks representing the top of the brackets should be aligned and level.

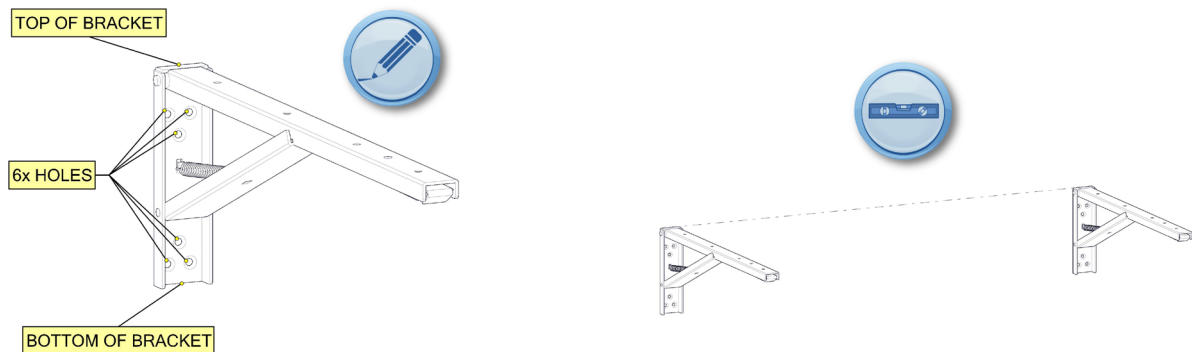


## 2 Drill pilot holes

If mounting to drywall:

- Use a 11/64" drillbit to create 2-1/4" deep pilot holes.

If mounting to concrete wall:


- Use a 5/16" drillbit to create 2-1/2" deep pilot holes.
- Insert the plastic anchors into the pilot holes.



# Folding Wall Mounted Workbench

## 3 Mount brackets to wall

- Place the bracket back into the previously marked position and fix it to the wall with three wall mount screws. Use a drill with the Philips head bit to ensure the screws are tightened.
- Use a level to ensure that the bracket is level; if it is not, adjust the bracket until it is.
- Release the lower segment of the bracket and fold it down it. Insert three wall mount screws through the remaining three holes in the bracket and into the wall.
- Repeat for the other bracket.

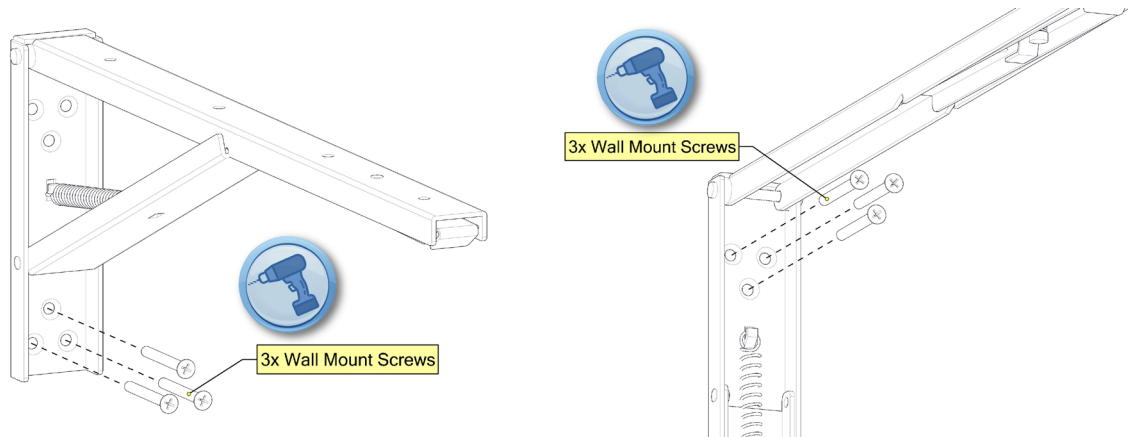


## 4 Mount bench top to brackets


- Place both brackets in the upright position. Lay the bench top on top of the bracket.
- Use a level to ensure the bench top is level. If it is not, adjust the vertical position of the brackets.
- Position the bench top so that there is a 1/4" gap between the wall and the table edge.

### NOTE:

If applicable, make sure the safety edge of the bench top is facing away from the wall.

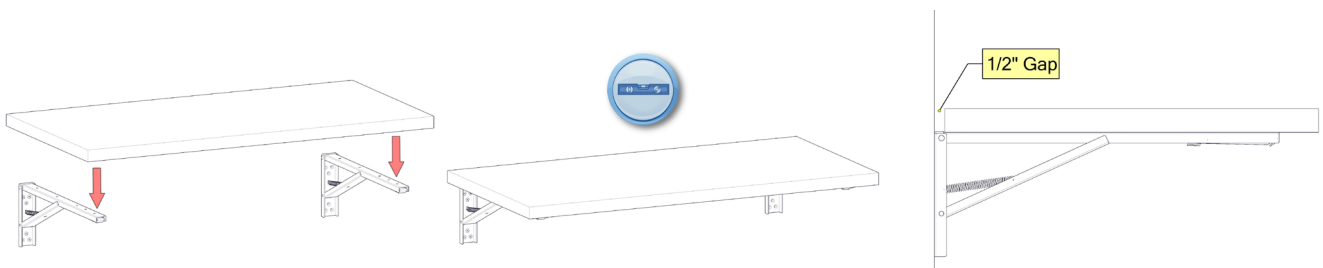


- Have the other person hold the bench top in place. Release the lower segment of the bracket and fold it down. Drill four wood screws through the holes in the bracket and into the underside of the bench top.
- Place the bracket back into the locked upright position then repeat for the other bracket.

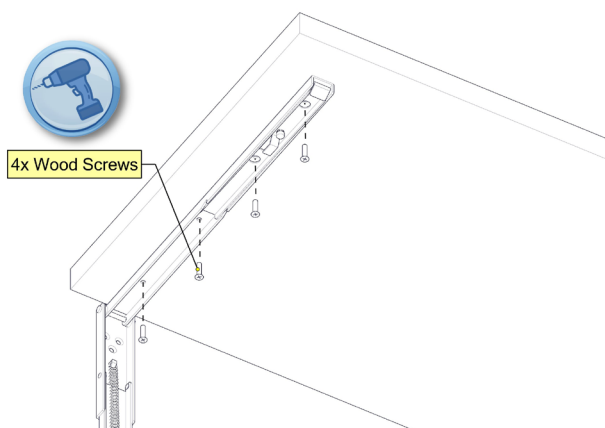

## Folding Wall Mounted Workbench

### 5 Before using the workbench:

- Ensure all screws have been properly tightened and both brackets are securely fixed to the wall.
- Test the folding functionality of the work bench:
  - To fold the workbench, grab the edge of the table with both hands and simultaneously press the levers at the end of both brackets with your fingers. Lift the table slightly upwards to allow the lower segment of the bracket to slide out of its notch. Slowly lower the table until it is in a vertical position.
  - To unfold the workbench, grip the bottom edge of the workbench and raise it until the lower segment of the bracket slips into the notch on the upper bracket segment.

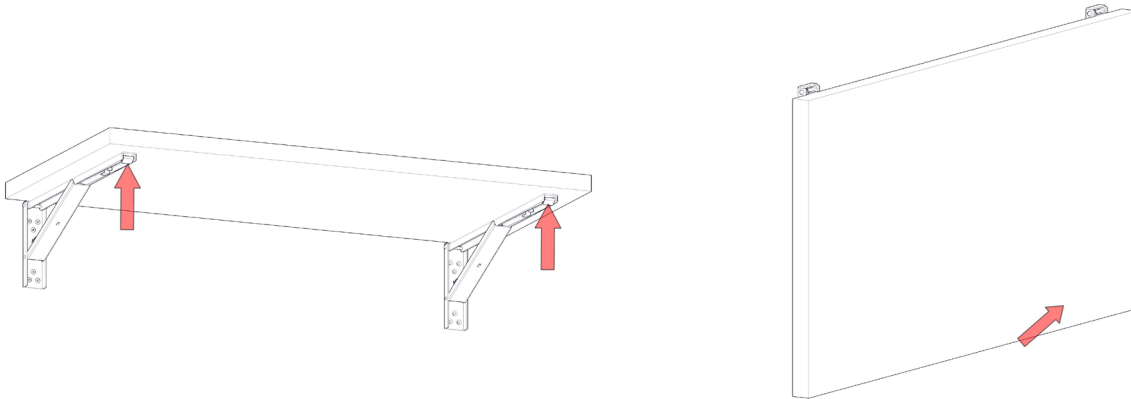

#### NOTE:

If there is not enough clearance for the workbench to lift up when folding it down, the distance between the wall and the edge of the bench top will need to be adjusted.

#### WARNING:

Do not drop the workbench when lowering the bench top.  
 Keep fingers away from brackets when folding and unfolding workbench.  
 Each time the workbench is unfolded, user must make sure both brackets are locked in the upright position and workbench is stable before using it.