



GLOBALTM
INDUSTRIAL

We can supply that.[®]

User's manual	Manual del usuario	Manuel de l'utilisateur
Customer Service US: 1-800-645-2986	Servicio de atención al Cliente US: 1-800-645-2986	Service à la clientèle Canada: 888-645-2986

Product Description

Model(s): 670691

Global Industrial Line Striper, 20 oz. Aerosol Spray Can Capacity

GENERAL DESCRIPTION

Description: These heavy duty, metal striping machines are specifically designed for use with Striping Paints on a variety of surfaces.

Benefits: Line Striper units feature all steel construction, a wind screen for clean paint lines and the capacity to carry one full case of paint. The VAS has 7-inch wheels and is designed for use on most smooth surfaces. It will spray lines approximately 2 to 4 inches wide.

Note: When it is set at the highest adjustment for the widest stripe, the line edges may not appear as crisp as they do with the more narrow settings.

Application: Use on athletic fields, parking lots, industrial plant facilities, playgrounds, municipal, etc.

Directions: Review instructions supplied with the unit, and back panel of Striping Paint can before use.

Assembly

1. Remove unit from carton.
2. Loosen the wing nut that secures the upper handle to the lower handle assembly and the two wing nuts that to secure the lower handle assembly to the body of the unit.
3. Raise upper handle in line with the lower section and tighten the wing nut.
4. Position the lower section connection arms on the body and fasten with the wing nuts at the bottom edge of the unit and tighten the wing nuts.







**GLOBALTM
INDUSTRIAL**

We can supply that.[®]

User's manual	Manual del usuario	Manuel de l'utilisateur
Customer Service US: 1-800-645-2986	Servicio de atención al Cliente US: 1-800-645-2986	Service à la clientèle Canada: 888-645-2986

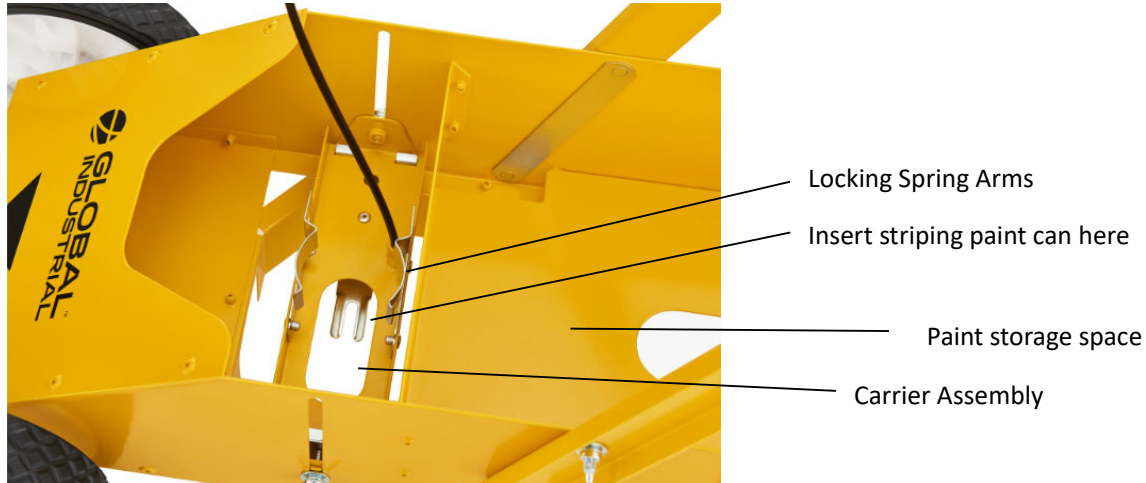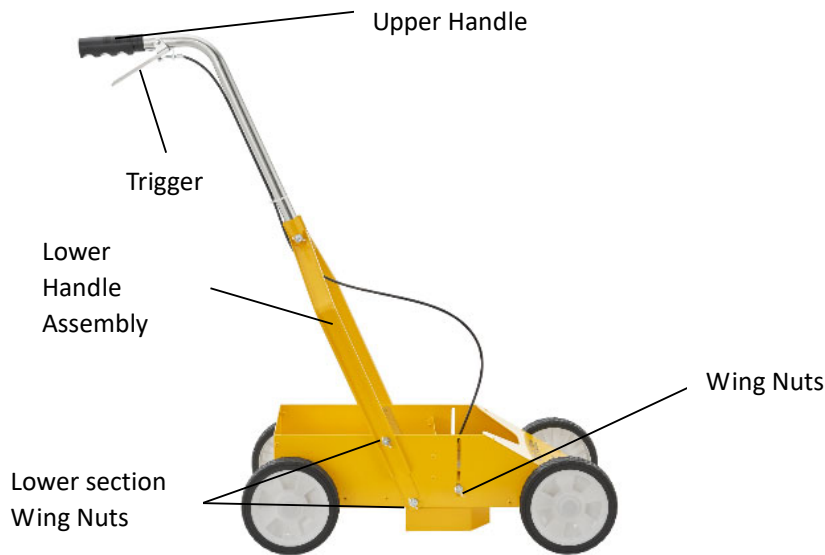

Operation

1. When viewing from the front of the unit, insert a can of Striping Paint in the inverted position on the left side of the carrier assembly.
2. Slide the can into position under the two locking spring arms.
3. Evacuate contents of the can by squeezing the trigger.
4. To vary the width of the sprayed line, loosen the two carrier assembly wing nuts and raise the assembly for a wider line or lower it for a narrower line. Tighten the wing nuts when the desired line width is achieved. It is best to test the unit for line width compliance on a piece of cardboard prior to actual operation.
5. A full case of Striping Paint may be carried on the unit in the space available.
6. When spraying is complete, remove the can by sliding to the left in the carrier assembly and lift out.