



Assembly Instructions

Customer Service
US: 1-800-645-2986

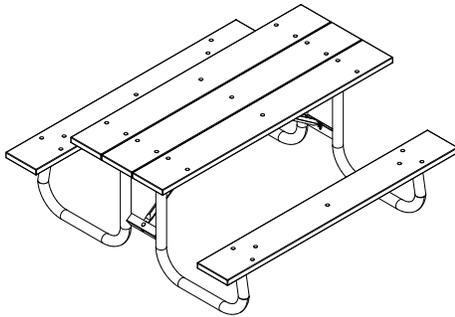


CONTENTS					
Ref.	Qty.	Description	Ref.	Qty.	Description
1	2	Table Supports	4	1	Middle Table Strut
2	2	Arm Struts	5	2	Seat Slats
3	3	Table Top Slats	H1	1	Hardware Pack

Before you begin: Check components to verify all are included. Assembly requires two people and must be performed on a flat and even surface. Do not overtighten hardware as damage can occur.

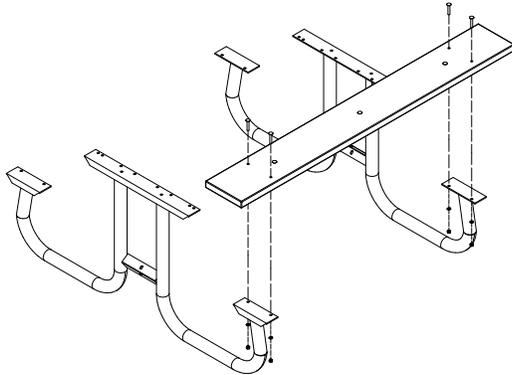


Step 1

Position the table supports upright and parallel to each other on a flat surface. Lay a seat slat across the mounting surface of each support with the angle brace (mounted under seat) facing down. Attach using 2 1/4" long carriage bolts, lock washers and hex nuts. Repeat for the other side.

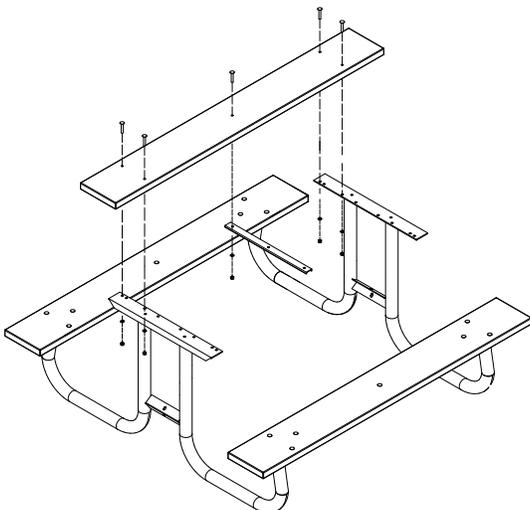

Step 2


Attach one outside edge table top slat to the supports using 2 1/4" long carriage bolts, lock washers and hex nuts. Place middle table strut with flat side facing up and perpendicular to the underneath side of previously installed table top board, attach using 2 1/4" long carriage bolt, lock washer and hex nut.

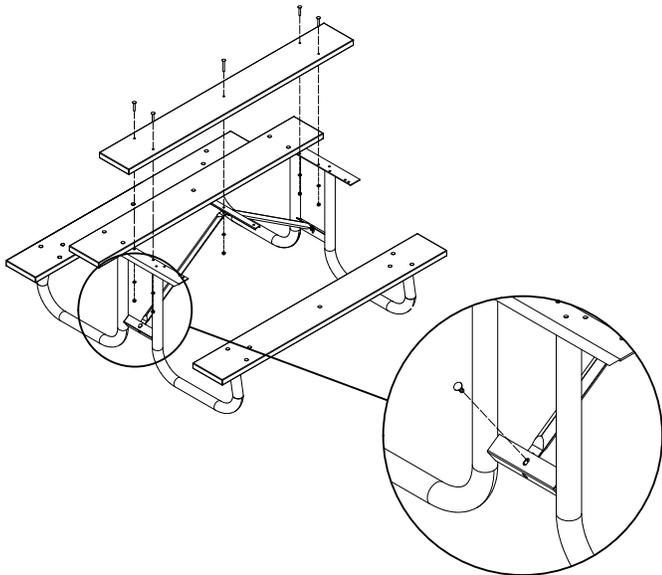

Connection Detail

Step 3

Attach center table top slat to supports using 2 1/4" long carriage bolts, lock washers and hex nuts. Position both arm struts on the middle table strut, attach to strut and middle slat using a 3" long carriage bolt, flat washer, lock washer and hex nut, leave loosely tightened. Attach both support arms to lower table support lbracket using 1" hex bolt, flat washer, lock washer, and hex nut.

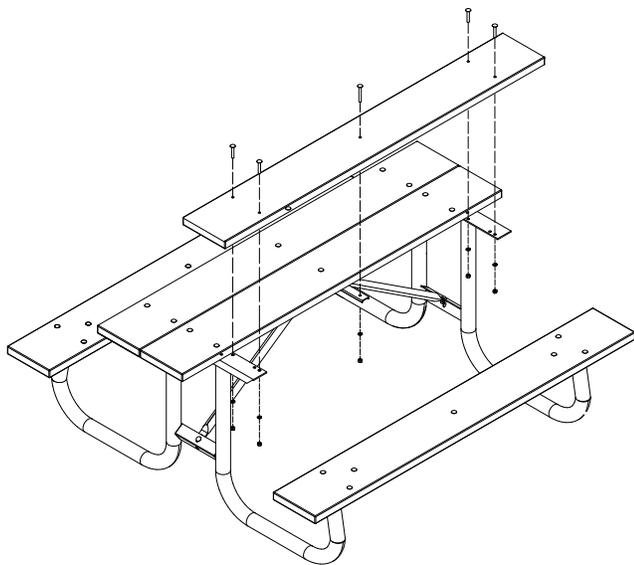

Step 4

Attach the remaining table top slat to the supports and middle strut using 2 1/4" long carriage bolts, lock washers and hex nuts. All hardware can now be tightened.

