

## LIFTING BEAMS

Non-Conductive Battery Lifting Beam




### NON-CONDUCTIVE BATTERY LIFTING BEAM

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow lift lug for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to handle large batteries
- Natural spark proof insulation
- Optional Hooks and Lug connections available - call for ordering assistance
- Made in U.S.A.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.

Prop 65 – See Page 100

Working Load Limit in Pounds*	Part Number	A	B	C	D	HR	L min	L max	Weights
2,000	17441	3.8	3.0	1.0	0.63	10.15	18.0	30.0	55 LBS
2,000	17442	3.8	3.0	1.0	0.63	10.15	30.0	42.0	65
4,000	17443	3.8	3.0	1.0	0.63	12.20	18.0	30.0	65
4,000	17171	3.8	3.0	1.0	0.63	12.20	30.0	42.0	75

\* Call for specifications on larger sizes and capacities

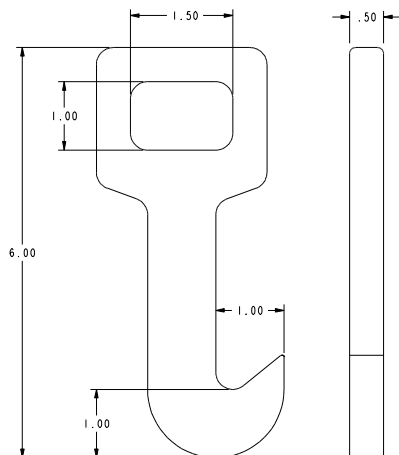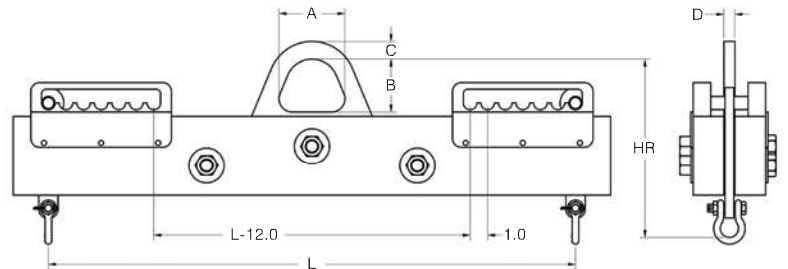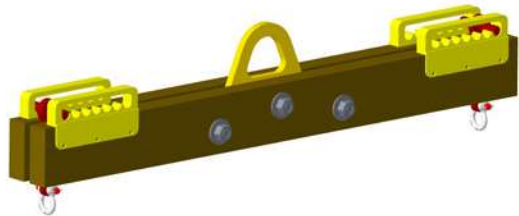

#### OPTIONAL BATTERY J HOOK

P/N: 22094  
(sold each)  
2,000 LB WLL