
## **HYDRAULIC BOX DUMPERS - HBD-2-36**

APPROX WEIGHT: 1614.70 lbs.

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

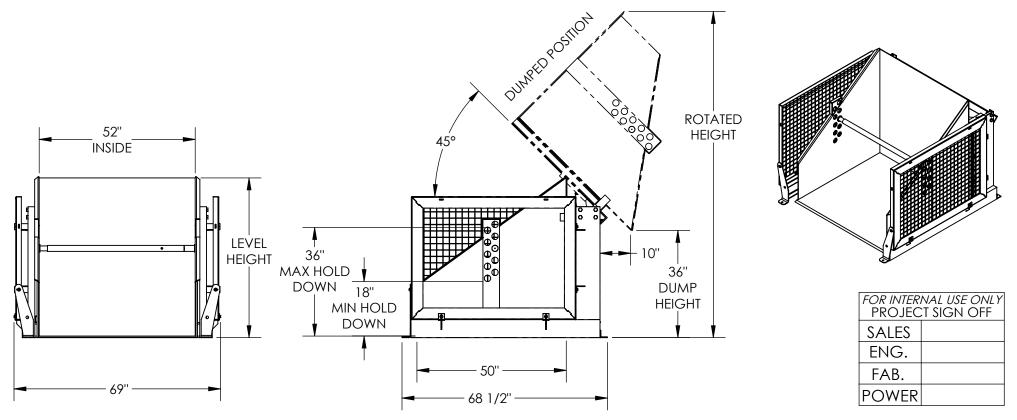

## STANDARD FEATURES

HYDRAULIC BOX DUMPER **MODEL NUMBER IS HBD-2-36** CHUTE IS 52" W X 50"L (USABLE) DUMPER CAPACITY IS 2000 LBS. **DUMP HEIGHT IS 36"** HOLD DOWN WILL ACCEPT BOXES 18" TO 36" HIGH W/ HOLES EVERY 2" FRAME WIDTH IS 69" FRAME LENGTH IS 68 1/2" LEVEL HEIGHT IS 53 1/2" **ROTATED HEIGHT IS 111"** DUMP ANGLE IS 45° CHROME PLATED CYLINDER WITH EMERGENCY STOP VELOCITY FUSE 3 PAINT IS VESTIL ROYAL BLUE WARNING: CHECK STATE AND LOCAL CODES!!

NOTE: SINGLE PH. PLUG-IN UNITS WILL HAVE APPROX 120 SEC DUMP / 33 SEC LOWER

## PLEASE CIRCLE SPECIFICATIONS:

LLAJL	CINC	<u></u>	<u>Jr L</u>	·		<i>7</i>	CIVO
POWER	AC		* E	* DC		* AIR/OIL	
MOTOR V	OLTA	GE	115	20	3	230	460
DEDICATED CIRCUIT REQUIRED							
MOTOR P	HASE	SE SINGLE		THREE			
CONTR	OL.		HANE	HAND —		* FOOT	
~ ALL BATTERY CHARGERS ARE 115V AC ~							
BATTERY CH	HRG.	RE	MOT	E	0	N-BO	ARD
CHRG. INDIC	CATOR		YES			NC	)
* AVAILABLE AT ADDITIONAL COST							
	MOTOR V DEDIG MOTOR P CONTR ~ ALL BA BATTERY CH	POWER AG  MOTOR VOLTAG  DEDICATED  MOTOR PHASE  CONTROL  ~ ALL BATTERY CHRG.  CHRG. INDICATOR	POWER AC  MOTOR VOLTAGE  DEDICATED CI  MOTOR PHASE S  CONTROL  ~ ALL BATTERY CHA  BATTERY CHRG. RE  CHRG. INDICATOR	POWER AC *-E  MOTOR VOLTAGE 115  DEDICATED CIRCUI  MOTOR PHASE SINGL  CONTROL HAND  ~ ALL BATTERY CHARGERS  BATTERY CHRG. REMOT  CHRG. INDICATOR YES	POWER AC * DC  MOTOR VOLTAGE 115 200  DEDICATED CIRCUIT RE  MOTOR PHASE SINGLE  CONTROL HAND  ~ ALL BATTERY CHARGERS AR  BATTERY CHRG. REMOTE  CHRG. INDICATOR YES	POWER AC * DC  MOTOR VOLTAGE 115 208  DEDICATED CIRCUIT REQ  MOTOR PHASE SINGLE  CONTROL HAND *  ~ ALL BATTERY CHARGERS ARE TO BATTERY CHRG. REMOTE O  CHRG. INDICATOR YES	MOTOR VOLTAGE 115 208 230  DEDICATED CIRCUIT REQUIRED  MOTOR PHASE SINGLE THR  CONTROL HAND * FOO  ~ ALL BATTERY CHARGERS ARE 115V AC  BATTERY CHRG. REMOTE ON-BO  CHRG. INDICATOR YES NO

S!!

# SPECIAL FEATURES REFERENCE: X NONE QUOTED LEAD

#### DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.

## ANY MODIFIED UNITS ARE NON-RETURNABLE

[ ] As marked

	[ ]	[ ]
Signed:		Date:

Printed Name:\_\_\_

Ρ

R

0

| || LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING
DISTRIBUTOR'S NAME: || P.O.# ...

SINIC	ANUFACTURING	VF\$TII
7	ANUFACTUR	VFSTII

VESTIL MANUFAC	W.Ο.# X	
DRAWN BY: CA	DATE: 09/22/2011	SALES: X

CA 09/22/2011 SALLS. X

[ ] As drawn

REFERENCE: X SCALE: 1:32 FILE NAME:

QUOTED LEAD TIME: X QUOTE # 34-007-004