

# CADET COM-PAK MAX



- Enjoy years of reliable use with our sturdiest sealed element
- Rest easy—includes high-temperature safety shutoff feature
- Fit any application with horizontal or vertical installation options
- Durable design built for years of trouble-free use
- Multi-watt options available
- Easy installation

**The Com-Pak Max warms up living rooms, bedrooms, and other areas. And you've got options—install vertically or horizontally, with two different grill choices to fit any room.**

## ARCHITECTURAL - ENGINEERING INFORMATION

Fan forced up flow electric air heaters are ETL listed, factory dual field rated 208V/240V. The powder coated wall mounting can for this heater is made from 20-gauge sheet steel with seven electrical knockouts and 34 cubic inches for a wiring compartment. Each complete heater is of unitized construction, attaches to the wall can with a single screw and is self-contained and completely separate from the wall mounting can. Element construction is a coiled nichrome heating wire sealed in a steel sheath with steel fins brazed to the sheath. Heating unit includes a 16-amp rating at 240V, high temperature manual reset limit switch. A two stage centrifugal blower is driven by an impedance protected motor. The motor is totally isolated from the heating chamber. Metal grills are of one piece, constructed of 22-gauge steel and finished with a powder coat paint system.

## TECHNICAL INFORMATION

UL safety standards require the heater to be placed a minimum distance of 6 inches (15.2 cm) from adjacent surfaces and 4-1/2 inches (11.4 cm) from the floor. Cadet recommends a 12-inch clearance from all surfaces for longer and cleaner performance. A 3-foot (91.44 cm) minimum clearance is required for furniture or other objects placed directly in front of the heater. This model is not approved for ceiling installation. Electric wall heaters and thermostats work best when installed on an inside wall. We recommend installing the heater assembly after walls are finished. Heater must be cleaned every six months minimum.

# COM-PAK MAX



Grill: 12"W x 9"H x 1"D or 9"W x 12"H x 1"D


Rough-in: 10-1/8"W x 8"H x 4"D or 8"W x 10-1/8"H x 4"D

Heater assemblies require CC or CCSM wall can, grill kit, and may require a thermostat


PART	MODEL	DESCRIPTION	WATTS	VOLTS	AMPS	BTUS	WT/LBS
65037	CM158	Heater assembly without thermostat	700/800/1500	208	3.4/3.8/7.2	2390/2730/5120	5
65033	CM198	Heater assembly without thermostat	400/700/1100/1500/1900	208	1.9/3.4/5.3/7.2/9.1	1710/2730/4095/5120/6825	4.8
65034	CM198T	Heater assembly with thermostat					5
65035	CM152	"	700/800/1500	240	2.9/3.3/6.3	2390/2730/5120	4.3
65036	CM152T	"	525/600/1125	208	2.5/2.9/5.4	1790/2045/3840	4.5
65031	CM192	"	400/700/1100/1500/1900	240	1.7/2.9/4.6/6.3/7.9	1365/2390/3755/5120/6485	4.3
65032	CM192T	"	300/525/825/1125/1425	208	1.4/2.5/4.0/5.4/6.9	1025/1790/2815/3840/4860	4.5

## WALL HEATER ACCESSORIES (MODEL CM)

PART	MODEL	DESCRIPTION	VOLTS	AMPS	WT/LBS
67061	CC	Wall can for model CM, single or 10-pack			2.8
67060	CC10				22.5
69111	CCSMW	Surface mount wall can for model CM, white, almond or black			4.4
69112	CCSMA				
69110	CCSMB				
67079	CGW	Vertical grill kit for model CM, single or 10-pack, white			1.5
67081	CGW10				12.3
67075	CGA	Vertical grill kit for model CM, single or 10-pack, almond			1.5
67080	CGA10				12.3
67082	CGB	Vertical grill kit for model CM, single or 10-pack, black			1.5
67083	CGB10				12.3
65005	CMGW	Horizontal grill kit for model CM, single or 5-pack, white			2.0
65006	CMGW5				7.5
65015	CMGA	Horizontal grill kit for model CM, single or 5-pack, almond			2.0
65016	CMGA5				7.5
67063	CTT1W	Built-in thermostat kit for model CM, single pole, 40°F to 85°F, white or almond	240/208/120	22	.2
67065	CTT1A				
67064	CTT2W	Built-in thermostat kit for model CM, double pole, 40°F to 85°F, white or almond	240/208/120	22	.2
67066	CTT2A				
67067	CTT1P	Built-in thermostat kit, tamper proof for model CM, single or double pole, 40°F to 85°F	240/208/120	22	.2
67068	CTT2P				
06395	CS4MW	Surface mount adapter for model CM, 9-1/2" w x 12-5/8" h x 4-3/8" d, white or almond			3.5
06390	CS4MA				
67105	CAMW	Adapter plate for model CM, 18-1/2" w x 22" h, white or almond			3.5
67100	CAMA				
67115	SAMW	Adapter plate for model CM 12" w x 21-1/4" h, white or almond			2
67110	SAMA				

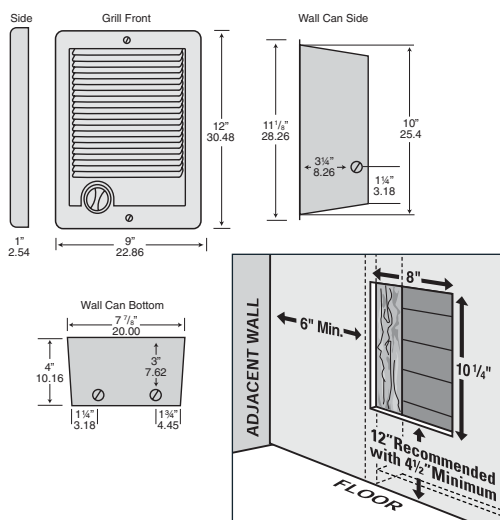

ROUGH-IN: 8" W x 10-1/8" H x 4" D

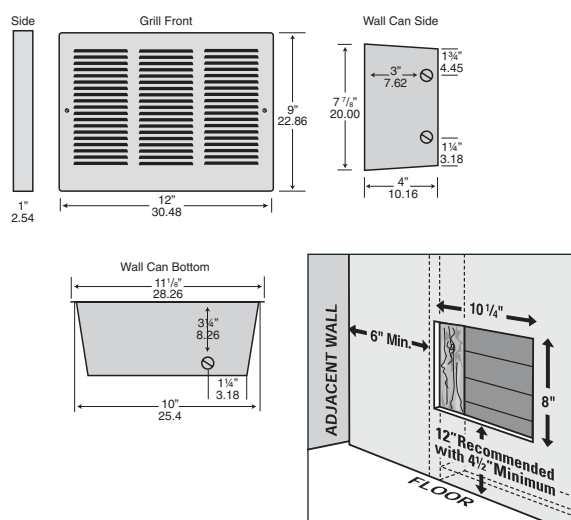

ROUGH-IN: 10-1/8" W x 8" H x 4" D

