

User's manual

Manual del usuario

Manuel de l'utilisateur

Customer Service
US: 1-800-645-2986

Servicio de atención al Cliente
US: 1-800-645-2986










Service à la clientèle
Canada: 888-645-2986

Aluminum Park Bench With Backrest

Models: 436978BK



NOTE: Mounting hardware is not included.

REF.	DESCRIPTION	PICTURE	QTY
A	Leg		2
B	Support Tube		2
C	End Slats		4
D	Slats		5
E	Support Ribs		2
F	Bolt		4
G	Self Drilling Screw		36
H	Screw		28
I	Allen Key		1



Warning

- Assembly and installation of equipment should be performed by 2 people.
- Workers should use OSHA approved safety and lifting equipment.



Warning


- Ensure that the bench is installed on a level surface.
- Ensure surface is of a strong material, preferably concrete.
- Use proper mounting hardware.



Warning

- Do not climb on, under or through tables and benches.
- Two people required to move tables and benches.
- Do not use if any parts of bench or table are broken or damaged.
- Inspect and tighten hardware every six months.
- Replace rusted hardware and damaged components.

Aluminum Park Bench With Backrest

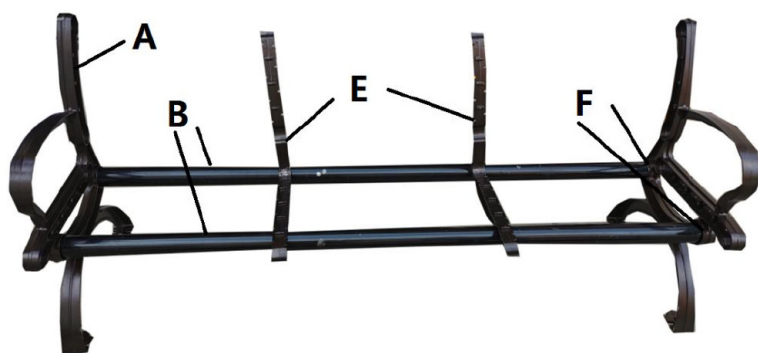

Step 1:

Connect the 2 support tubes (Ref. B) with both legs (Ref. A) with bolts (Ref F). Do not fully tighten.


Step 2:

Place both support ribs (Ref. E) evenly spaced on top of the support tubes.



Step 3:

Insert and connect both end slats and slats (Ref. C and Ref. D) in between the legs with screws (Ref. H) on both ends. Do not fully tighten. Repeat this with both the seat and backrest slats.

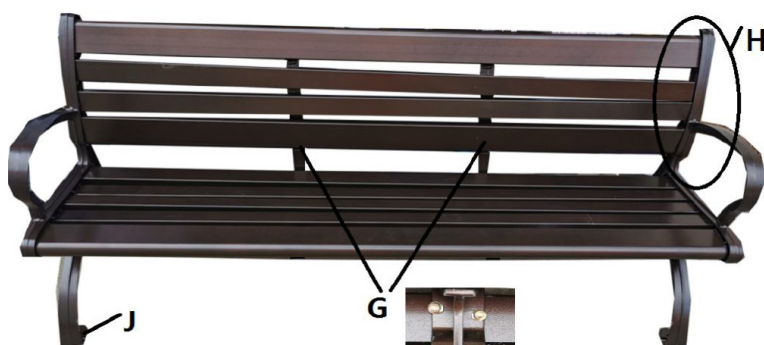

Step 4:

Screw down the support ribs with the self drilling screws (Ref. G). Fully fasten all screws

NOTE: Mounting hardware is not included.