THE THOUGHTFUL SOLUTION FOR THOSE WITH SPECIAL NEEDS.



ADULT EXTENDED RECESSED 100SSE-SM

Global Industrial Item Number B2311695

- Durable, bacteria resistant tray
- ADA and ANSI compliant when properly installed
- Made in the USA

- Easy-to-clean safety strap that adjusts with one hand
- Limited 5 year warranty
- Supports 400 lbs




BABY CHANGERS MADE BY BABY EXPERTS.™




5216 Portside Dr • Medina, OH 44256, U.S.A.
Public Washroom Sales Manager
Phone: 330-723-9814



BABY CHANGERS MADE BY BABY EXPERTS™

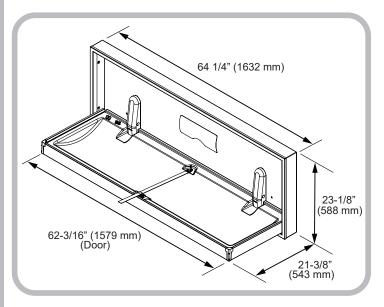

Recommended Blocking Surface Mount

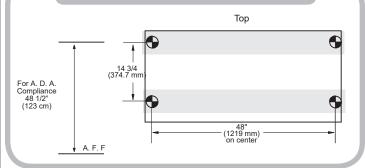

Installation Information

- Unit projects 4 inches (100 mm).
- Rough-in opening 63.25 inches (1607 mm) wide x 21.75 mm) (552 high. Shim as required for tight fit on all 4 sides.
- Open unit project from wall 21.375 inches (543 mm).

Submittal Sheet

Model 100SSE-SM Special Needs Stainless Steel Diaper Changing Station

- Full body 16 gauge, 304 brushed stainless steel.
- ABS replaceable tray liner.
- Rated to support a static load of 400 pounds (181 kg).
- Adult or physically challenged changing station ideal for schools, nursing homes and hospitals.
- Smooth nylon belt with Thermoplastic Polyurethane coating. Easy to sanitize and adjustable with one hand.
- Full stainless steel frame and hinges provide maximum durability.
- Easy to read ANSI compliant labels (ANSI Z535.3 and ANSI Z535.4), utilizing universal safety symbols.
- Pneumatic gas shock mechanisms to ensure smooth, safe open and close motions.
- Includes universal changing station door sign.
- Universal changing station plaque on front of unit.
- Surface mount requires additional flange. Specify model 100SSE-SM.
- Extended length of 62 inches (1575 mm).
- Limited Warranty: This product is warranted against manufacturing defects for a period of 5 years.

Short Specifications

Full 304 brushed stainless steel exterior with vacuum formed polystyrene changing surface.

- 1. A.D.A Compliant attached buckle.
- 2. Acceptable product: Foundations Worldwide, Inc.; 100SSE-SM (Horizontal Surface Mount).
- 3. Characteristics:
 - a. Entire body 16 gauge, 304 brushed stainless steel, seamless welds.
 - b. Provide Foundations Worldwide, Inc. 200-SSLD; stainless steel liner dispenser.
- 4. Equipped with pneumatic cylinders.
- 5. Smooth nylon belt with Thermoplastic Polyurethane coating. Easy to sanitize and adjustable with one hand.
- 6. 400 lb. (181 kg) load rating exceeds ASTM F2285 requirements for weight bearing changing stations.

7. A.D.A. Compliance:



- 306.3 Knee Clearance
- 307.2 Maximum Protruding Objects
- 308.2 Forward Reach
- 308.3 Side Reach
- 309.4 Operation
- 902.3 Work Surface
- Compliant when properly installed.
- 8. ANSI compliant safety labels.
- 9. CPSIA compliant to applicable sections.